

Table of Contents

"FPrint Win 3.1" - HELP	6
How to install?	7
Working with FPrint WIN – Settings	10
Language support	14
File format	15
Commands and parameters for FP550, FP2000 - Albania	18
Manage sells	18
"38" – open non-fiscal receipt	18
"42" – print non-fiscal text	18
"39" – close non-fiscal receipt	18
"48" – open fiscal receipt	18
"49" – sell items	19
"51" – subtotal	19
"53" – payment	20
"54" – print fiscal text	20
"56" – close fiscal receipt	20
"60" – cancel current fiscal receipt	20
"109" – duplicate receipt	20
Manage the display	21
"33" – clear the display	21
"47" – show text on top row of the display	21
"35" – show text on bottom row of the display	21
"63" – show date and time	21
"100" – show text on both rows of the display	21
Other commands	22
"69" – execute reports	22
"70" – internal debiting and crediting (cash in/out)	22
"84" – print barcode	22
"106" – open the drawer	22
"79" – annual / monthly short report	23
"94" – annual / monthly detailed report	23
"122" – test mode	23
Commands and parameters for DP15 – Armenia	24
S - sale of an item	24
E - sale of an item with departments	24
T - end of receipt or payment	24
C - discount/surcharge	24
P - print text	24
I - official debiting / crediting	24
Y - opening non-fiscal receipt	24
Z – fiscal closure	24
D - receipt duplicate	24
X – cancel current fiscal receipt	24
48 – open fiscal receipt	24
58 – sale of programmed item	24
105 – operators report	24
107 – program and delete items	24
111 – items report	24

<u>Commands and parameters for FP550 - Bangladesh</u>	25
38 – open non fiscal (official) receipt	25
48 – open fiscal / exchange receipt	25
49 – sale of an item, exchange item (edit - new changes in v.3.1.0 build 36)	26
51 – subtotal (new in v.3.1.0 build 36)	27
69 – daily reports	28
70 – official cash in/out	28
84 – print barcode	28
<u>Commands and parameters for FP 60 - Ethiopia</u>	29
Manage sells	29
"38" – open non-fiscal receipt	29
"42" – print non-fiscal text	29
"39" – close non-fiscal receipt	29
"48" – open fiscal receipt	29
"55" – open refund receipt	30
"49" – sell items	30
"51" – subtotal	31
"53" – payment	31
"54" – print fiscal text	31
"56" – close fiscal receipt	32
"60" – cancel current fiscal receipt	32
"109" – duplicate receipt	32
Manage the display	33
"33" – clear the display	33
"47" – show text on top row of the display	33
"35" – show text on bottom row of the display	33
"63" – show date and time	33
"100" – show text on both rows of the display	33
Other commands	34
"69" – execute reports / fiscal closures	34
"70" – internal debiting and crediting (cash in/out)	34
"84" – print barcode	34
"106" – open the drawer	34
"79" – annual / monthly short report	35
"94" – annual / monthly detailed report	35
<u>Commands and parameters for FP550, TM-T260F - Federation of Bosnia and Herzegovina</u>	36
Manage sells	36
"38" – open non-fiscal receipt	36
"42" – print non-fiscal text	36
"39" – close non-fiscal receipt	36
"48" – open fiscal receipt	37
"52" – sell items and show on the display	38
"51" – subtotal	38
"53" – payment	39
"55" – enter client information (invoice)	39
"56" – close fiscal receipt	39
"107" – programming and deleting items, changing price for programmed items	40
Manage the display	41
"33" – clear the display	41
"47" – show text on top row of the display	41
"35" – show text on bottom row of the display	41
"63" – show date and time	41
"100" – show text on both rows of the display	41
Other commands	42

"60" – winter/summer time change.....	42
"69" – daily fiscal closure.....	42
"70" – internal input and output of cash	42
"106" – open the drawer.....	42
"73" – fiscal memory report by memory block number.....	43
"79" – fiscal memory report by date.....	43
"105" – report operators.....	43
"111" – report items.....	43
"109" – duplicate documents within period or number of document.....	44
"300" – loading items from file.....	45
"301" – void receipt.....	45
"305" – custom command – add new item/change price of an existing item and then sell it.....	46
"350" – execute custom command.....	46

Commands and parameters for MP 55 Plus - Federation of Bosnia and Herzegovina..... 47

Manage sells.....	47
"38" – open non-fiscal receipt	47
"42" – print non-fiscal text.....	47
"39" – close non-fiscal receipt	47
"48" – open fiscal receipt.....	48
"52" – sell items and show on the display.....	49
"51" – subtotal	49
"53" – payment	50
"55" – enter client information (invoice).....	50
"56" – close fiscal receipt.....	50
"107" – programming and deleting items, changing price for programmed items	51
Manage the display.....	52
"33" – clear the display.....	52
"47" – show text on top row of the display.....	52
"35" – show text on bottom row of the display.....	52
"63" – show date and time.....	52
"100" – show text on both rows of the display.....	52
Other commands.....	53
"69" – daily fiscal closure.....	53
"70" – internal input and output of cash	53
"106" – open the drawer.....	53
"79" – fiscal memory report by date.....	54
"105" – report operators.....	54
"111" – report items.....	54
"109" – duplicate documents within period	55
"300" – loading items from file.....	55
"301" – void receipt.....	56
"305" – custom command – add new item/change price of an existing item and then sell it.....	57
"350" – execute custom command.....	57

Commands and parameters for FP550, FP1000 - Montenegro..... 58

Manage sells.....	58
"38" – open non-fiscal receipt	58
"42" – print non-fiscal text.....	58
"39" – close non-fiscal receipt	58
"48" – open fiscal receipt.....	58
"52" – sell items.....	59
"51" – subtotal	59
"53" – payment	60
"54" – print fiscal text.....	60
"56" – close fiscal receipt.....	60
"57" – cancel current fiscal receipt.....	60

"107" – programming and deleting items, adding quantity to programmed items	61
"109" – duplicate receipt.....	61
Manage the display.....	62
"33" – clear the display.....	62
"47" – show text on top row of the display.....	62
"35" – show text on bottom row of the display.....	62
"63" – show date and time.....	62
"100" – show text on both rows of the display.....	62
Other commands.....	63
"69" – execute reports.....	63
"70" – internal debiting and crediting (cash in/out).....	63
"106" – open the drawer.....	63
"79" – annual / monthly short report.....	63
"94" – annual / monthly detailed report.....	63

Common commands and parameters..... 64

S - sale of an item	64
E - sale of an item with departments.....	67
M – open new invoice {Only for DP 50, DP 500, MP55LD Albania}.....	68
R - sale of an item : {Only for FP 550 Republica Srpska}.....	68
G – Save an item into the printer : {Only for FP 550 Republica Srpska}.....	68
K – Delete items from the printer : {Only for FP 550 Republica Srpska}.....	68
T - end of receipt or payment.....	69
C - discount/surcharge in percents.....	70
P - print text.....	71
I - official debiting / crediting.....	71
F - allows keyboard input:.....	71
H - forbids keyboard input:.....	71
Y - opening non-fiscal receipt.....	72
B - beep command for ECR :.....	72
Z – fiscal closure	73
D - receipt duplicate	75
O – open drawer.....	75
L – sending text to the printer's display.....	76
V – immediate void	77
J – set date and time {Only for Albanian ECRs}.....	78
A – print barcode.....	78
X – cancel current fiscal receipt.....	78
48 – open fiscal receipt.....	79
58 – sale of programmed item.....	79
105 – operators report.....	80
107 – program and delete items.....	80
111 – items report.....	81

Working with FPrint WIN - running FPrintWIN from other applications..... 82

Fiscal devices setup..... 83

MP5000..... 83

MP-50..... 84

MP-55, MP55M, MP55L, MP55B..... 86

DP-50, DP-50D, DP 500..... 88

MP-500,MP-500T,MP-500TR..... 90

Samsung ER250F..... 92

<u>List of executable commands by devices</u>	94
<u>MP50, MP55, MP55B</u>	94
<u>MP5000</u>	96
<u>MP500, MP500T, MP500TR</u>	97
<u>MP55M, MP55L, DP-50, DP-50D, DP 500, MP-55LD</u>	99
<u>FP3530, FP550F, FP550F-40, FP300, FP300-Ke, FP1000, FP60, TM-T260F</u>	101
<u>FP60, FP550, FP300, FP1000 - Kazakhstan</u>	104
<u>FP 550 Republica Srpska</u>	106
<u>FP 550 Bangladesh</u>	108
<u>FP 550, FP2000 Albania</u>	110
<u>DP 500 plus, DP55 plus, MP55 plus – Romania</u>	112
<u>DP 500 plus, DP55 plus, MP55 plus – Latvia</u>	112
<u>DP 500 plus, DP55 plus, MP55 plus - Moldova</u>	113
<u>Samsung ER-250F</u>	114
<u>Fprint DLL – software developers guide</u>	115
<u>Functions</u>	115
OPEN_PORT.....	115
CLOSE_PORT.....	115
OPEN_TCPIP.....	116
CLOSE_TCPIP.....	116
EXECUTE_STRING.....	117
EXECUTE_FILE.....	117
GET_SERIAL_NUMBER.....	118
GET_SERIAL_NUMBER_TCPIP.....	118
GET_LAST_ERROR.....	119
GET_LAST_ERROR_MESSAGE.....	119
<u>Device indexes</u>	120
<u>Returned codes</u>	121
<u>Contact information and technical support</u>	123

"FPrint Win 3.1" - HELP

"FPrintWIN 3.1" is a program designed to manage sales from a text file to the electronic cash registers (ECR) MP5000, MP-500, MP-500TR, MP-50, MP-55, MP-55M, MP-55L, MP-55LD, DP-50, DP-50D, Samsung ER-250F and the fiscal printers (FP) FP3530, FP300, FP1000, FP550F , FP550F-40 and FP2000.

The program works in Windows 95/98/Me/NT/2000/XP environment.

How to install?

The installation of "FPrintWin" is a simple procedure.


You can start the installation process from the disk or find the latest version of the program at:

<http://datecs.bg/support.php?cat=4>

In that case, after you download the "Install.exe" from Internet, extract the files in a directory of your choice. When file extraction finishes the installation of the program automatically starts up:




Press the "OK" button to pass on to the license agreement:

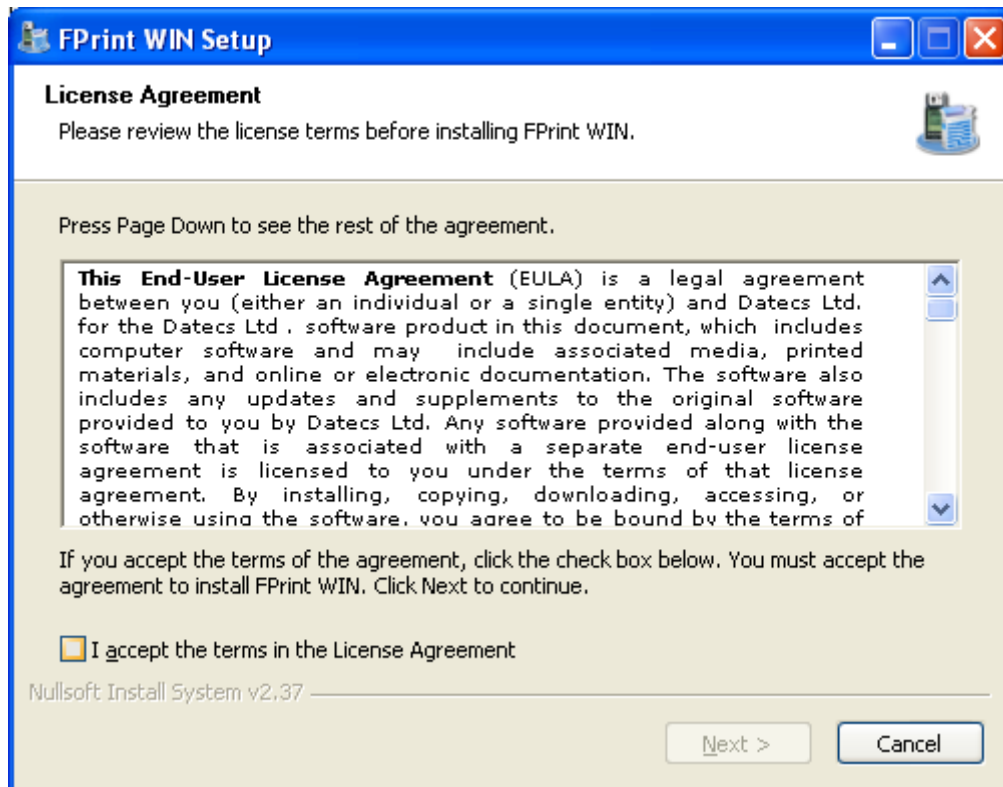


Please, read the license agreement carefully and if you agree with the conditions stated in it, choose " I accept the terms in the license agreement" and then click "Next".

In the window that comes next you can easily click the "Install" button or decide on another place for the installation.

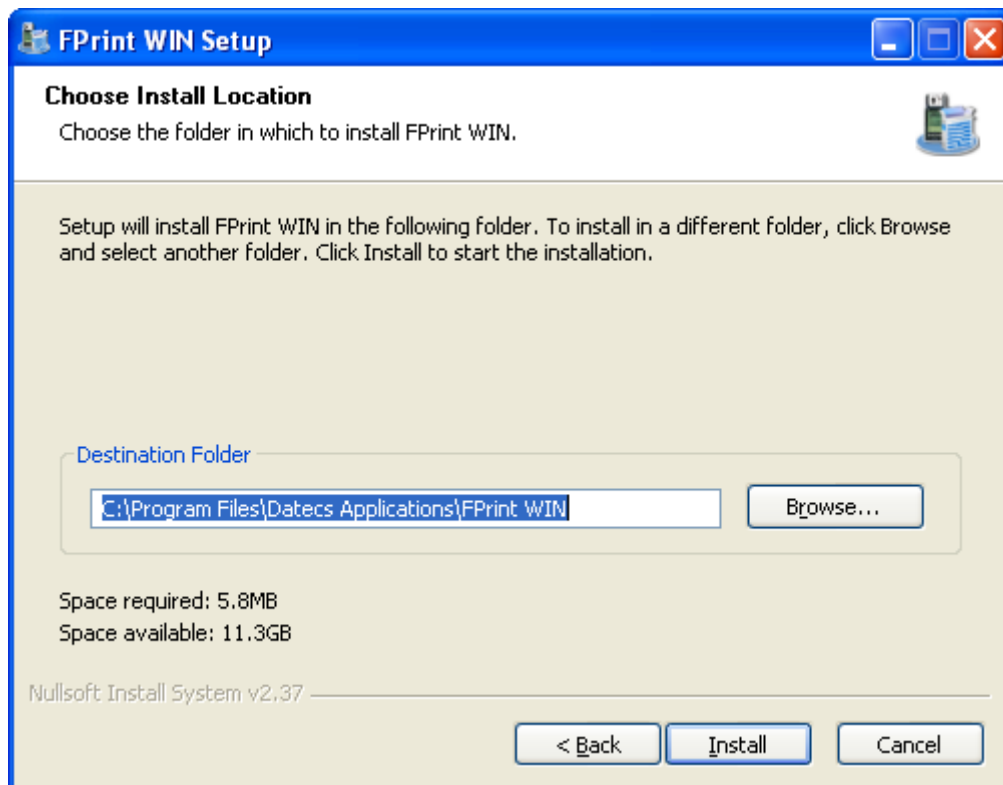

"FPrintWin" has been successfully installed - click "Finish".

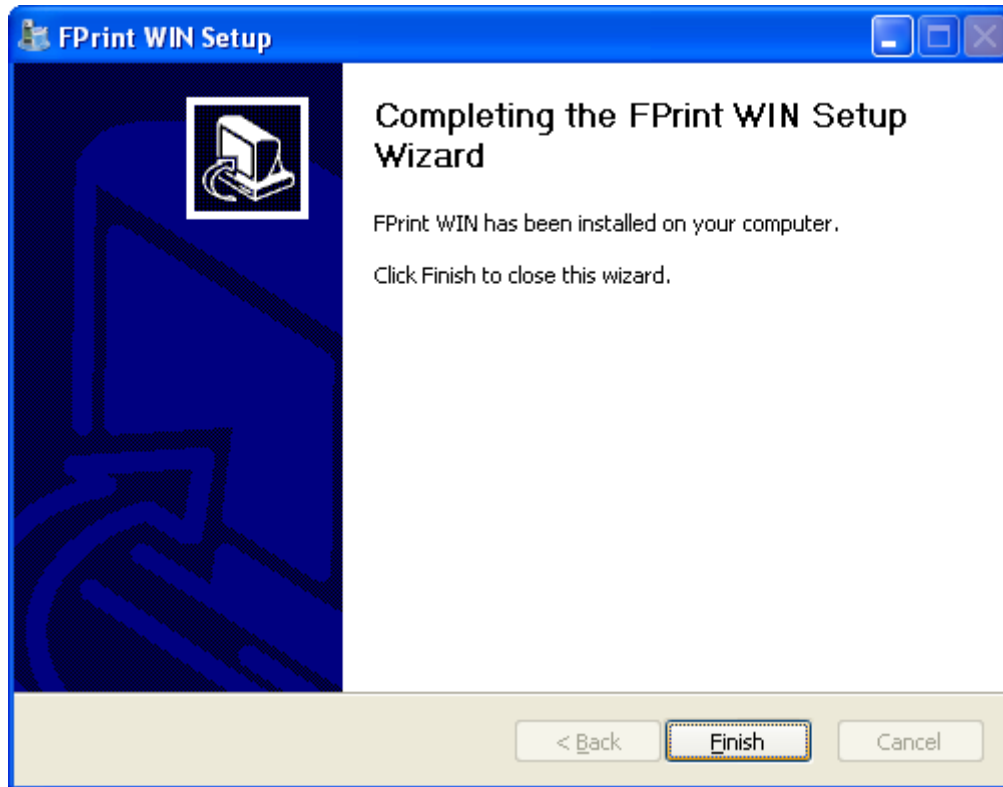


IMPORTANT!!!

The installation and the program setting must be done only by the system administrator.

Working with FPrint WIN – Settings

Run the program from Start>Programs>Datecs Applications and choose FPrint or go to the folder of the program ("C:\Program Files\Datecs Applications\FPrint") and click the FPrint.exe. This will open the main window:

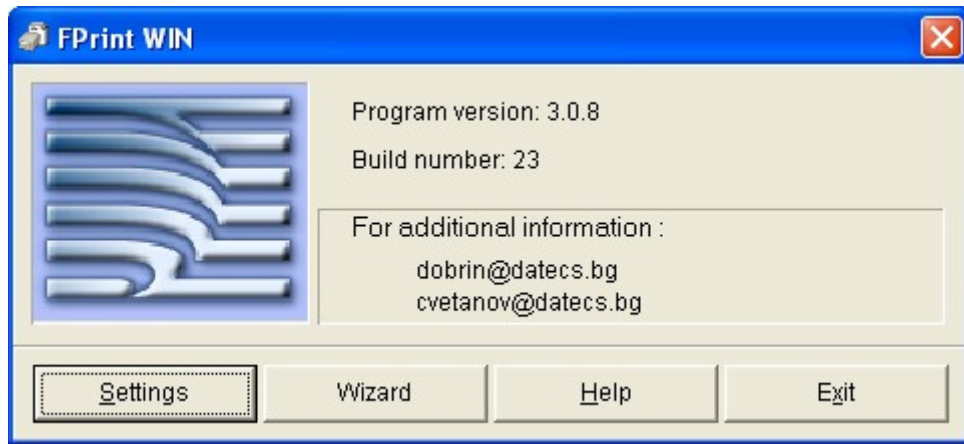

The main window buttons are:

1. Settings - opens the window with the program settings.
2. Wizard – a step by step program settings.
2. Help - runs "FPrintWin" help;
3. Exit - exits the program;

Settings

Country: Bulgaria

Device: FP 1000 DV

Communication type: ☒ RS232 ☐ IPv4

COM port: Com 4

Baud rate: 9600

Logical number: 1

Serial number from device: 008888

Get serial number

Key:

Choose Language : English

Type of answer

☒ Classical - (Ok;Er;Sd;No)

☐ Error number

Default executable file: D:\SOFT_SVN\PROJECTS\FPrint\WIN\BIN\execute\start.txt

Answer file: D:\SOFT_SVN\PROJECTS\FPrint\WIN\BIN\execute\start.txt

☒ Resident mode

Executable file directory: D:\SOFT_SVN\PROJECTS\FPrint\

Executable file name: s.inp

Executable file options : Delete file

Answer file directory: D:\SOFT_SVN\PROJECTS\FPrint\

Answer file name:

Answer file options: DateTime name - date_time_ansv

Log folder: D:\FPrint_logs\

☒ Answer in the same file

☐ DOS text

☒ Dont show error windows

☐ Dont delete executable file, if device is unresponsive

Operator password: 0000

Panic operation (only for certain devices, see documentation): Off

3.1.4.22

Save Cancel Help

1. Country: Select your country;
2. Devices: Select the type of your device;
3. COM port: Select the COM port to which the device is being connected;
4. Baud rate: The baudrate (communication speed) must be the same as the one set in the ECR (see"Fiscal Devices Setup");
5. Logical number: You must enter the logical number of your device, if it has one;
6. Serial number: If it the device is a cash register, set the device in Sales Mode- put the key in "REG" position and log in as the respective operator.
7. Press the "Get serial number" button and the fiscal device with the respective settings will enter and save its serial number for you.
8. Key: Enter the registration key for this serial number;
9. Choose language setting for the program's interface – English or Bulgarian available;(NOTE – this settings can be changed by any user, not only by the administrator);
10. "Answer in the same file" :If the box is not checked, you can save the answer of your order in another file chosen by you;

11. You can select default files for reading and saving by browsing with the  button (not in resident mode).

12. In case the program working with "FPrint WIN" has not set as a parameter the name of the order text file, "FPrint WIN" uses the default file and saves the answer in the file that has been selected for the "Answer file:" field. If the field contains no file path, "FPrint WIN" will search for the file in its own folder (the folder where "FPrint WIN" was installed);

13. The result of every text file command that is carried out can be saved in a service field (see "File Format")) in two different ways, depending in what you have marked for "Type of answer"(see "Types of Errors");

14. If your program generates DOS Cyrillic, you must check the "DOS text" box. The checkbox is not obligatory if you work with a fully Windows-based program.(Only for Bulgarian Edition)


15. The checkbox “Dont show error windows” redirects the error messages to the log file instead of being shown as a message box on the screen.

Notice that if you use this the log file gets bigger over time(albeit being just text) and if you generate a lot of errors you must remember to check/delete it.

16. The “Dont delete executable file if device is unresponsive” option is designed for resident mode and the “delete file” executable option. If selected, the file is not deleted in case the device is switched off or not responding for some reason.

17. New in version 3.00 is the option for resident mode.

This mode allows you to execute sells by copying a text file with a name of your choice or default name('sell_execute.txt') into a directory of your choice.

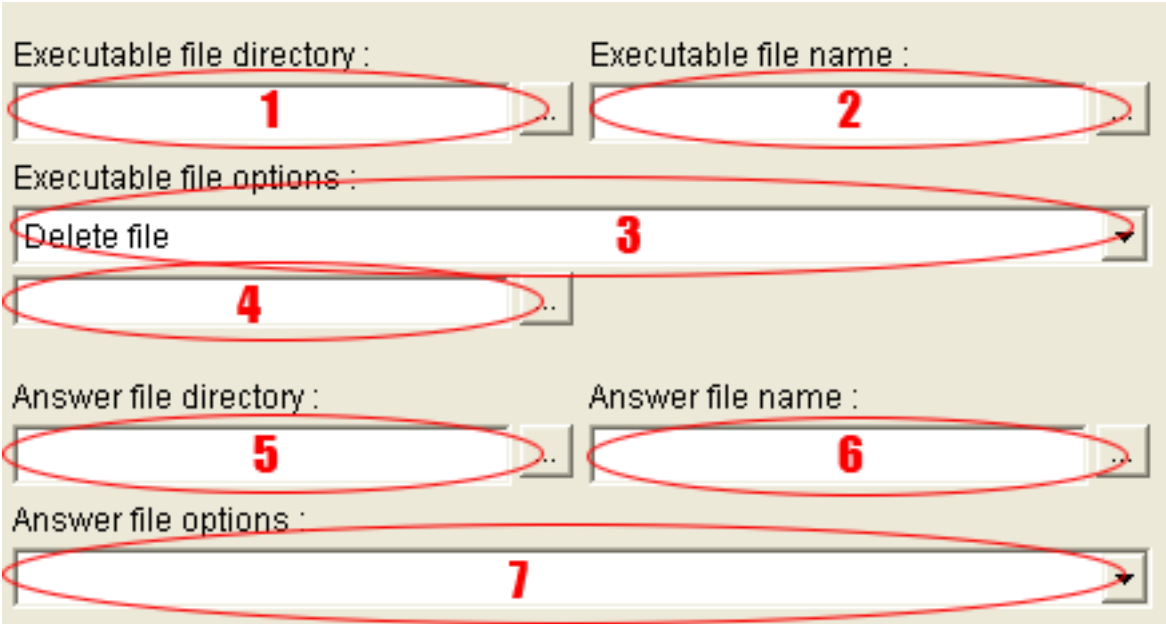

The screenshot shows the FPrint WIN interface with the following fields and highlights:

- Executable file directory :** Field 1 (highlighted with a red circle and number 1).
- Executable file name :** Field 2 (highlighted with a red circle and number 2).
- Executable file options :** Field 3 (highlighted with a red circle and number 3).
- Answer file directory :** Field 5 (highlighted with a red circle and number 5).
- Answer file name :** Field 6 (highlighted with a red circle and number 6).
- Answer file options :** Field 7 (highlighted with a red circle and number 7).

1. Select directory (press ) and copy the file with sales here in order to execute it. OBLIGATORY FIELD.

2. Select name for the file with sales, which Fprint will try to execute(if no name is selected then Fprint tries to execute with default name – sell_execute.txt). You can also use wildcard symbols (e.g. *.inp will execute all files in the folder with .inp extension)

3. Select whether to delete the executable file after print('Delete file option') or rename and move it to another directory('Move to directory' option). OBLIGATORY FIELD.
4. If you've selected 'Move to directory' from option 3, here you can select directory where the printed file will be moved. Obligatory if option 3 is 'Move to directory'.
5. Select directory for the answer file(press ). OBLIGATORY FIELD.
6. Select name for the answer file (if no name is selected then default name is sell_answer.txt).
7. Select whether you will have only one answer file('Constant name' option) or after each finished bill Fprint will generate different answer file('Date time name' option). OBLIGATORY FIELD.
8. The resident mode timeout, used to check the execution folder is 0.2 seconds.
9. **NEW** in ver 3.1.3.1 and above – if field “Answer file name” is blank and “constant name” in answer options I selected, then the answer will be saved in the answer folder, but the name will be the same as the execute filename.

18. Operator password – used in fiscal printers and ECRs with SM cards. Set this password to correspond to the password of operator 1 in the device. By default FPs password is 0000, for ECRs its 1.

19. Panic operation

Allows unfinished receipts to be closed either automatically or after confirmation from the user.

WARNING!!! This option is currently supported for bulgarian devices only.

To save all the settings for the current device, click "Save". You may choose to repeat the process for your backup fiscal device.

For your facilitation you can use the “Wizard” ,which will guide you through the above process step by step.

In case Fprint raises errors due to various reasons (wrong settings, bugs, etc.), a log file is created (Fprint_log.txt).

Language support

Currently Fprint supports Bulgarian, English , Romanian and Kazakh languages (you can even add your own language).

On start, Fprint reads the language texts from a file (which is different for each language), therefor you can change the caption of each label in the program by editing that particular file.

The supported language list is stored in the “Language_list.txt” file in the program's folder and it looks like this:

Bulgarian;BGR.txt

English;ENU.txt

Romanian;RO.txt

Kazakh;KZ.txt

Bosnian;BH.txt

Each row in this file has 2 columns, separated by the ; symbol. First column is the full language name (i.e. “English”) and the second column is the file name (i.e. “ENU.txt”).

If you want to edit a label in the program, just open the file for your language (the files are in the main folder of the program), find the text and replace it.

If you want to add a new language:

- open the file “ Language_list.txt” and append a row like this (i.e. I will add Spanish):
Spanish;SP.txt
- close Fprint and reopen it, select Spanish language and restart again
- you should have a “SP.txt” in the folder now, edit its contents the way you want
- run Fprint with your new language

File format

The input file contains ASCII text commands. Each line consists of only one command. The commands' format is:

[command], [logical number], [service field];[parameters]

[command]: this field contains one of the following letters: S, T, P, C, I, H, F, Y, D, Z, B;
{ Version 3.09 and above supports number commands for some printers }

[logical number]: this is the number saved in table 2, field 1 of the ECR; for FP the field is irrelevant, allowed value is 0~99;

[service field]: consists of 3 sub-fields, each divided by a comma. Every sub-field contains respectively 6, 1 and 2 underlines.

(NOTE: for fiscal printers FP550-Kz,FP300-Kz,FP1000-Kz, the service field is 10,1,2 underlines - _____,_,_)

_____,_,_

In this field FPRINT records the result of the respective command execution. In the first 6-lined field, what is recorded is the ECR or FP serial number. The second 1-line field saves an index from 0 to 9 (**NOTE:** Albanian DP50D, DP500 and MP55LD might save numbers 0 - 99), whose value increases with each successful command. The last 2-lined field indicates whether and how a command has been carried out in the following format:

___ - unprocessed record ;

Depending on what type of answer you have chosen when setting the program (see Settings), the result is either saved in a DOS "FprintWin" compatible format (classical answer) or what is recorded is the error number, if such occurs.

Classical answer :

Er - the command has not been carried out due to an error in field [parameters] or invalid command sequence during work with FP (for example: S, T - payment without closing the receipt, S or S, C, C, or S, Z);

Ok - the command is successful;

Sd - the command has not been carried out; possible reasons: paper is out; the printer was

turned off during print; there is a problem with the fiscal memory or the printing device; the FP clock is not set;

No - the respective ECR or FP does not execute this command (not considered as an error);

Error number/result :

0 -Command successful;

1 - Communication error! Make sure the device is working properly and check if it is connected to the computer;

2 – Command execution error;

3 - The program cannot open COM port No

4 - There is no such device;

5 -Incorrect command parameters;

6 - Non-existent file;(check your execute and answer file paths);

7 - Wrong file structure;

8 - Please, enter the registration key;

9 - Please, enter all the parameters correctly;

10 - Unspecified error.

11 – Out of paper

12 – Fiscal command not allowed

The numbers 0,1,2,5,10,11 and 12 are recorded in the file service field, and the rest can be displayed as program messages.

When starting Fprint with parameters (see section [Working with FPrint WIN - running FPrintWIN from other applications](#)) and you pass the 5th parameter (dont show pop-up windows) with value „1“, the following errors will be logged in the error log file:

- 1 - Communication error! Make sure the device is working properly and check if it is connected to the computer; - the log file row will be like this:
 - „04.8.2009 11:52:48:**Communication error! Make sure the device is connected and switched on.**“
- 3 - The program cannot open COM port No; - the log file row will be like this:
 - „04.8.2009 11:52:48:**The program can not open port: COM №**“
- 6 - Non-existent file; - the log file row will be like this:
 - „04.8.2009 11:52:48:**File does not exist.**“
- 7 - Wrong file structure; - the log file row will be like this:
 - „04.8.2009 11:52:48:**Something is wrong with this file!**“

- 8 - Please, enter the registration key; - the log file row will be like this:
 - „04.8.2009 11:52:48:***Please enter your registration key!***“

Commands and parameters for FP550, FP2000 - Albania

Manage sells

"38" – open non-fiscal receipt

38,[logical number],_____,_,_;

The command won't be executed if there is already opened receipt. In non-fiscal receipts you can only print non-fiscal text.

"42" – print non-fiscal text

42,[logical number],_____,_,_:[text];

- [text] is random text (max 30 symbols)

You can print non-fiscal text only in opened non-fiscal receipt.

"39" – close non-fiscal receipt

39,[logical number],_____,_,_;

The command won't be executed if there is no opened receipt.

"48" – open fiscal receipt

48,[logical number],_____,_,_;[operator];[password];[InvoiceNum];

- [operator] is the operator number (1-16)
- [password] is the password (6 digits) for the operator
- [InvoiceNum] is the invoice number. If present, the printer opens an invoice with that number.

The command won't be executed if there is already opened receipt/invoice.

"49" – sell items

49,[logical number],_____,_,_;[item];[price];[quantity];[tax group];[exchange];[flag];[amount];

- [item] is the name of the item (up to 24 symbols for FP);
- [price] is the price of a single item (-999999.99 ~ 99999.99 for FP; the negative price is used for voiding sales);
- [quantity] is the quantity sold (a number 0 ~ 99999.999);
- [tax group] is the tax group of the item (2 ~ 9); apart from the 8 tax groups there is a tax free group (accessible with the number 1);
- [exchange] is a number that determines if the item is being returned:
 - value "1" – means that the item is being returned
 - value "0" – means that the item is not a returned one
- [flag] is a number that means:
 - value '0' – surcharge in percent (max 99.00%)
 - value '1' – discount in percent (max 99.00%)
 - value '2' – surcharge in sum (max 8 digits)
 - value '3' – discount in sum (max 8 digits)
- [amount] is the sum of the discount/surcharge in percent or sum (depending on the [flag parameter])

The printer will not carry out this command if:

- the maximum number of sales (99) within a single receipt is already reached;
- the sum by any of the tax groups is negative;
- the sum of discounts and surcharges within the receipt is negative;

"51" – subtotal

51,[logical number],_____,_,_;[Print];[Display];[Flag];[Amount];

- [Print] – parameter that determines if the sum of the subtotal will be printed out:
 - value '0' – do not print
 - value '1' – print
- [Display] – parameter that determines if the sum of the subtotal will appear on the display:
 - value '0' – don't show on display
 - value '1' – show on display
- [Flag] – parameter that determines the type of the subtotal:
 - value '0' means surcharge in percent (max 99%)
 - value '1' means discount in percent (max 99%)
 - value '2' means surcharge in sum (max 8 digits)
 - value '3' means discount in sum (max 8 digits)
- [Amount] – the sum of the discount/surcharge (whether the amount is in percent or value depends on the [flag] parameter)

"53" – payment

53,[logical number],____,_,_:[flag];[amount];

- [flag] – parameter that determines the type of the payment:
 - value '0' means payment in cash
 - value '1' means payment via credit
 - value '2' means payment via cheque
 - value '3' means payment via debit card
 - value '4' - programmable payment 1
 - value '5' - programmable payment 2
 - value '6' - programmable payment 3
 - value '7' - programmable payment 4
- [amount] – the sum of the payment

The parameters [flag] and [amount] are optional and if you skip them, the command will execute payment in cash with the whole sum of the current receipt.

"54" – print fiscal text

54,[logical number],____,_,_:[text];

- [text] is random text (max 30 symbols)

"56" – close fiscal receipt

56,[logical number],____,_,_;

The command closes a fiscal receipt, but only if payment is done.

"60" – cancel current fiscal receipt

60,[logical number],____,_,_;

The whole fiscal receipt will be canceled and closed as non-fiscal. This command will work only if no payments have been made yet.

"109" – duplicate receipt

109,[logical number],____,_,_:[Count];

- [Count] is the number of copies to be printed;

This command must be executed only after the last printed receipt is closed.

Manage the display

"33" – clear the display

33,[logical number],_____,_,_;

"47" – show text on top row of the display

47,[logical number],_____,_,_:[text];

- [text] is random text (20 symbols max)

"35" – show text on bottom row of the display

35,[logical number],_____,_,_:[text];

- [text] is random text (20 symbols max)

"63" – show date and time

63,[logical number],_____,_,_;

"100" – show text on both rows of the display

100,[logical number],_____,_,_:[text];

- [text] is random text (40 symbols max)

Other commands

"69" – execute reports

69,[logical number],_____,_,_;[flag];

- [flag] determines the report type:
 - value '0' means Z report with registry clear
 - value '1' means X report without registry clear

"70" – internal debiting and crediting (cash in/out)

70,[logical number],_____,_,_;[flag];[amount];

- [flag] – determines the type of operation:
 - value '0' means cashing in / debit
 - value '1' means cashing out / credit
- [amount] – the sum of the debit/credit

"84" – print barcode

84,[logical number],_____,_,_;[type];[value];

- [type] is a number that defines the barcode type:
 - 1 : EAN8
 - 2 : EAN13
 - 3 : Code 128
- [value] is the barcode value to be printed. Depending on the barcode type it has variable size (EAN8 is only 7 digits, EAN13 is 12 digits and Code128 is between 9 and 18 symbols)

Printing barcode can be done only in opened receipts (nonfiscal, fiscal)

"106" – open the drawer

106,[logical number],_____,_,_;

"79" – annual / monthly short report

79,[logical number],____,_,_:[Year];[Month];

- [Year] – defines the year (format 'YY');
- [Month] – defines the month (format 'MM');

If the month parameter is empty or 0, an annual report is executed.

"94" – annual / monthly detailed report

94,[logical number],____,_,_:[Year];[Month];

- [Year] – defines the year (format 'YY');
- [Month] – defines the month (format 'MM');

If the month parameter is empty or 0, an annual report is executed.

"122" – test mode

122,[logical number],____,_,_:[Mode];

- [Mode] switches the testing mode on and off (0 – off, 1 – on);

WARNING! When you execute this command, Z report with registry clear will be automatically executed.

Commands and parameters for DP15 – Armenia

S - sale of an item

Additional remark for this command:

If the first row in a file is the S command, but with negative [quantity] parameter, the command opens “Storno” receipt and sells that and every subsequent S item with negative value.

E - sale of an item with departments

Additional remark for this command:

If the first row in a file is the E command, but with negative [quantity] parameter, the command opens “Storno” receipt and sells that and every subsequent E item with negative value.

T - end of receipt or payment

C - discount/surcharge

P - print text

I - official debiting / crediting

Y - opening non-fiscal receipt

Z – fiscal closure

D - receipt duplicate

X – cancel current fiscal receipt

48 – open fiscal receipt

58 – sale of programmed item

105 – operators report

107 – program and delete items

111 – items report

Commands and parameters for FP550 - Bangladesh

See the list of executable commands for devices (some of the common commands are also supported for this printer). Also refer to the example file in the “Sample files” folder in the installation.

38 – open non fiscal (official) receipt

(this command is currently allowed only for “Bangladesh FP550”)

38,[logical number],_____,_,_:[operator];[password];

* [operator] is the operator number (1-16)

* [password] is the password (6 digits) for the operator

Only the P command (printing of text), command 84 (print barcode) and the T command (closing the official receipt) can be executed in a non-fiscal receipts.

48 – open fiscal / exchange receipt

(this command is currently allowed only for “Bangladesh FP550”)

48,[logical number],_____,_,_:[operator];[password];[exchange];

* [operator] is the operator number (1-16)

* [password] is the password (6 digits) for the operator

* [exchange] is a digit (0 or 1) – “0” opens standart fiscal receipt, “1” opens exchange receipt

After you open exchange receipt, first you should input all the items that are returned by the customer (see command 49 - “exchange” parameter must be “1”), then the item(s) that are replacing the returned item(s)(see command 49 - “exchange” parameter must be “0”).

49 – sale of an item, exchange item (edit - new changes in v.3.1.0 build 36)

(this command is currently allowed only for “Bangladesh FP550”)

New changes are marked with red color

49,[logical number],_____,_,_:[item];[price];[quantity];[tax group];[exchange];[flag];
[amount]

- * [item] is the name of the item (up to 24 symbols for FP);
- * [price] is the price of a single item (-999999.99 ~ 99999.99 for FP; the negative price is used for voiding sales);
- * [quantity] is the quantity sold (a number 0 ~ 99999.999);
- * [tax group] is the tax group of the item (1 ~ 4); apart from the 4 tax groups there is a 5th (accessible with the number 5) that is a tax free group.

- * [exchange] is a number that determines the item type in an exchange receipt:
 - value “1” – means that the item is being returned by a customer and is to be replaced
 - value “0” – means that this is the newly selected item that replaces the returned oneIn a non-exchange receipt the value for this parameter should be “0”.
- *[flag] is a number that means:
 - value '0' – surcharge in percent (max 99.00%)
 - value '1' – discount in percent (max 99.00%)
 - value '2' – surcharge in value (max 8 digits)
 - value '3' – discount in value (max 8 digits)
- *[amount] is the sum of the discount/surcharge in percent or value (depending on the [flag parameter])

IMPORTANT: If you decide to use discount/surcharge here, make sure you dont use the “C” command as well (since it also makes discount/surcharge, but only with %).

FP will not carry out this command if:

- * the maximum number of sales (99) within a single receipt is already reached;
- * the sum by any of the tax groups is negative;
- * the sum of discounts and surcharges within the receipt is negative;

In each of the cases the result of executing the command will be "Er".

51 – subtotal (new in v.3.1.0 build 36)

(this command is currently allowed only for “Bangladesh FP550”)

51,[logical number],_____,_,_;;[Print];[Display];[Flag];[Amount];

[Print] – parameter that determines if the sum of the subtotal will be printed out:

- value '0' – do not print
- value '1' – print

[Display] – parameter that determines if the sum of the subtotal will appear on the display:

- value '0' – dont show on display
- value '1' – show on display

[Flag] – parameter that determines the type of the subtotal:

- value '0' means surcharge in percent (max 99%)
- value '1' means discount in percent (max 99%)
- value '2' means surcharge in value (max 8 digits)
- value '3' means discount in value (max 8 digits)

[Amount] – the sum of the discount/surcharge (whether the amount is in percent or value depends on the [flag] parameter)

69 – daily reports

(this command is currently allowed only for “Bangladesh FP550”)

69,[logical number],_____,_,_;[operator];[password];[type];

* [operator] is the operator number (1-16)

* [password] is the password (6 digits) for the operator

* [type] is a digit for report type (0 – executes “Z” report /clears the registry/; 1 – “X” report)

70 – official cash in/out

(this command is currently allowed only for “Bangladesh FP550”)

70,[logical number],_____,_,_;[type];[sum];[operator];[password];

* [type] is a number with a 0 value (cash in) or 1 (cash out);

* [sum] is the sum to be cashed in/cashed out;

* [operator] is the operator number (1-16)

* [password] is the password (6 digits) for the operator

84 – print barcode

(this command is currently allowed only for “Bangladesh FP550”)

84,[logical number],_____,_,_;[type];[value];

* [type] is a number that defines the barcode type:

1 – EAN8

2 – EAN13

3 – Code 128

* [value] is the barcode value to be printed. Depending on the barcode type it has variable size (EAN8 is only 7 digits, EAN13 is 12 digits and Code128 is between 9 and 18 symbols)

Printing barcode can be done only in opened receipts (nonfiscal, fiscal or exchange)

Commands and parameters for FP 60 - Ethiopia

Manage sells

"38" – open non-fiscal receipt

38,[logical number],_____,_,_;

The command won't be executed if there is already opened receipt. In non-fiscal receipts you can only print non-fiscal text.

"42" – print non-fiscal text

42,[logical number],_____,_,_:[text];

➤ [text] is random text (max 30 symbols)

You can print non-fiscal text only in opened non-fiscal receipt.

"39" – close non-fiscal receipt

39,[logical number],_____,_,_;

The command won't be executed if there is no opened receipt.

"48" – open fiscal receipt

48,[logical number],_____,_,_:[operator];[password];[TIN];

- [operator] is the operator number (1-16)
- [password] is the password (6 digits) for the operator
- [TIN] is the tax identification number of the buyer, non mandatory parameter, 10 digits

The command won't be executed if there is already an opened receipt/invoice.

"55" – open refund receipt

55,[logical number],_____,_,_;[operator];[password];[TIN];

- [operator] is the operator number (1-16)
- [password] is the password (6 digits) for the operator
- [TIN] is the tax identification number of the buyer, non mandatory parameter, 10 digits

The command won't be executed if there is already an opened receipt/invoice.

"49" – sell items

49,[logical number],_____,_,_;[Item_name1][Item_name2];[price];[quantity];[tax group];[unit name];
[flag];[amount];

- [Item_name1] is the first(top) line of the item name (up to 26 symbols);
- [Item_name2] is the second(bottom) line of the item name (up to 30 symbols);
- [price] is the price of a single item (-999999.99 ~ 99999.99 for FP; the negative price is used for voiding sales);
- [quantity] is the quantity sold (a number 0 ~ 99999.999);
- [tax group] is the tax group of the item (1 ~ 4);
- [unit name] max 8 symbols for measurement unit of the quantity
- [flag] is a number that means:
 - value '0' – surcharge in percent (max 99.00%)
 - value '1' – discount in percent (max 99.00%)
 - value '2' – surcharge in sum (max 8 digits)
 - value '3' – discount in sum (max 8 digits)
- [amount] is the sum of the discount/surcharge in percent or sum (depending on the [flag parameter])

The printer will not carry out this command if:

- the maximum number of sales (99) within a single receipt is already reached;
- the sum by any of the tax groups is negative;
- the sum of discounts and surcharges within the receipt is negative;

"51" – subtotal

51,[logical number],_____,_,_:[Print];[Display];[Flag];[Amount];

- [Print] – parameter that determines if the sum of the subtotal will be printed out:
 - value '0' – do not print
 - value '1' – print
- [Display] – parameter that determines if the sum of the subtotal will appear on the display:
 - value '0' – don't show on display
 - value '1' – show on display
- [Flag] – parameter that determines the type of the subtotal:
 - value '0' means surcharge in percent (max 99%)
 - value '1' means discount in percent (max 99%)
 - value '2' means surcharge in sum (max 8 digits)
 - value '3' means discount in sum (max 8 digits)
- [Amount] – the sum of the discount/surcharge (whether the amount is in percent or value depends on the [flag] parameter)

"53" – payment

53,[logical number],_____,_,_:[flag];[amount];

- [flag] – parameter that determines the type of the payment:
 - value '0' means payment in cash
 - value '1' means payment via credit
 - value '2' means payment via cheque
 - value '3' means payment via debit card
 - value '4' - programmable payment 1
 - value '5' - programmable payment 2
 - value '6' - programmable payment 3
 - value '7' - programmable payment 4
- [amount] – the sum of the payment

The parameters [flag] and [amount] are optional and if you skip them, the command will execute payment in cash with the whole sum of the current receipt.

"54" – print fiscal text

54,[logical number],_____,_,_:[text];

- [text] is random text (max 30 symbols)

"56" – close fiscal receipt

56,[logical number],_____,_,_;

The command closes a fiscal receipt, but only if payment is done.

"60" – cancel current fiscal receipt

60,[logical number],_____,_,_;

The whole fiscal receipt will be canceled and closed as non-fiscal. This command will work only if no payments have been made yet.

"109" – duplicate receipt

109,[logical number],_____,_,_[Count];

➤ [Count] is the number of copies to be printed;

This command must be executed only after the last printed receipt is closed.

Manage the display

"33" – clear the display

33,[logical number],_____,_,_;

"47" – show text on top row of the display

47,[logical number],_____,_,_:[text];

- [text] is random text (20 symbols max)

"35" – show text on bottom row of the display

35,[logical number],_____,_,_:[text];

- [text] is random text (20 symbols max)

"63" – show date and time

63,[logical number],_____,_,_;

"100" – show text on both rows of the display

100,[logical number],_____,_,_:[text];

- [text] is random text (40 symbols max)

Other commands

"69" – execute reports / fiscal closures

69,[logical number],_____,_,_;[flag];[path to directory];

- [flag] determines the report type:
 - value '0' means Z report with fiscal closure
Depending on how the printer is fiscalized (print or download the electronic journal), the journal is either printed or saved. If its fiscalized to save the journal, the directory to save is defined by the parameter [path to directory] and the name of the file is the SHA signature.
 - value '1' means X report without fiscal closure
- [path to directory] – the directory(eg. C:\), where the journal is to be saved. The command will return error if it can't write to the specified directory (due to no access or permissions).

"70" – internal debiting and crediting (cash in/out)

70,[logical number],_____,_,_;[flag];[amount];

- [flag] – determines the type of operation:
 - value '0' means cashing in / debit
 - value '1' means cashing out / credit
- [amount] – the sum of the debit/credit

"84" – print barcode

84,[logical number],_____,_,_;[type];[value];

- [type] is a number that defines the barcode type:
 - 1 : EAN8
 - 2 : EAN13
 - 3 : Code 128
- [value] is the barcode value to be printed. Depending on the barcode type it has variable size (EAN8 is only 7 digits, EAN13 is 12 digits and Code128 is between 9 and 18 symbols)

Printing barcode can be done only in opened receipts (nonfiscal, fiscal)

"106" – open the drawer

106,[logical number],_____,_,_;

"79" – annual / monthly short report

79,[logical number],_____,_,__:[Year];[Month];

- [Year] – defines the year (format 'YY');
- [Month] – defines the month (format 'MM');

If the month parameter is empty or 0, an annual report is executed.

"94" – annual / monthly detailed report

94,[logical number],_____,_,__:[Year];[Month];

- [Year] – defines the year (format 'YY');
- [Month] – defines the month (format 'MM');

If the month parameter is empty or 0, an annual report is executed.

Commands and parameters for FP550, TM-T260F - Federation of Bosnia and Herzegovina

NOTE: Parameters in < > brackets are mandatory, while those in [] brackets are non-mandatory! The brackets by themselves are **not** passed along with the data value.

Manage sells

"38" – open non-fiscal receipt

38,1,_____,_,_;

The command won't be executed if:

- there is already opened receipt(fiscal or non-fiscal);
- the clock is not set;
- the fiscal memory is not formatted;

In non-fiscal receipts you can only print non-fiscal text.

"42" – print non-fiscal text

42,1,_____,_,_:[text];

- [text] is random text (max 30 symbols)

You can print non-fiscal text only in an opened non-fiscal receipt.

"39" – close non-fiscal receipt

39,1,_____,_,_;

The command won't be executed if there is no opened receipt.

"48" – open fiscal receipt

48,1,_____,_,_;<IOSA>;<Operator>;<Password>;<TillNumber>;[ReceiptNumber];

- <IOSA> – IOSA number (max 16 digits);
- <Operator> – operator number (1-32);
- <Password> – the operator's password (4 to 8 digits);
- <TillNumber> - till number (max 5 digits);
- [ReceiptNumber] – max 6 digits. If present and greater than zero, a “Reclamation” receipt is opened and this is the number of the receipt from which the warez are returned;

The answer file contains the following information:

48,1,_____,_,_;Total_Receipts,Fiscal_Receipts,Reclamation_Receipts;

- Total_Receipts – total number of issued receipts (fiscal and reclamation) since the last fiscal closure;
- Fiscal_Receipts – total number of issued fiscal receipts (this is the number of the last fiscal receipt);
- Reclamation_Receipts - total number of issued reclamation receipts;

The command won't be executed if:

- there is already opened receipt;
- the max number of receipts per day is already issued;
- the fiscal memory is full;
- the fiscal memory is corrupted;
- one of the mandatory parameters is missing or wrong;
- the operator's password is wrong;
- the clock is not set;
- the display is not connected;

"52" – sell items and show on the display

The command has 2 variations:

I. 52,1,_____,_,_:[+ -]<PLU>[quantity][percent];

- [+ -] <PLU> is the PLU number of the item (max 8 digits). If you pass the PLU number with a minus sign in front of it, the command will cancel the previous sale of that item (the prices of the sold/canceling items must be the same, the quantity can differ, but cannot go below the sold quantity);
- [quantity] is the quantity to be sold (a number 1.000 ~ 99999.999). If you skip this parameter, the default quantity is used (1.000);
- [percent] is the discount/surcharge in percents (-99.00% ~ 99.00% for FP 550, -100% ~ +100% for TM-T260) ;

II. 52,1,_____,_,_;<VF|VL>;

- <VF or VL> - **void** the first sold item in the receipt (VF) or the last item in the receipt (VL);

The printer will not carry out this command if:

- the maximum number of sales (99) within a single receipt is already reached;
- the sum by any of the tax groups is negative;
- the sum of discounts and surcharges within the receipt is negative;
- the display is disconnected

"51" – subtotal

51,1,_____,_,_;

The command shows the sum of the current sells in the receipt on the display.

"53" – payment

53,1,_____,_,_:[flag];[amount];

- [flag] – parameter that determines the type of the payment:
 - value '0' means payment in cash;
 - value '1' means payment via card;
 - value '2' means payment via cheque;
 - value '3' means payment type „Virman”;
- [amount] – the sum of the payment

The parameters [flag] and [amount] are optional and if you skip them, the command will execute payment in cash with the whole sum of the current receipt.

The command cannot be executed if :

- there is no opened receipt
- the accumulated sum is negative
- the sum for a tax group is negative
- the display is disconnected

"55" – enter client information (invoice)

55,1,_____,_,_;<IBK>;<Line 1>;<Line 2>;<Line 3>;[Line 4];[Line 5];[Line 6];

- <IBK> – exactly 13 symbols – client identification code;
- <Line 1>,<Line 2>,<Line 3> - up to 36 symbols of text each, the first three lines are mandatory;
- [Line 4];[Line 5];[Line 6]; - up to 36 symbols of text each, non mandatory parameters;

The command prints client information (up to 6 lines of text and IBK code). The IBK code and the lines of text after **full payment** is done, therefor the command won't be executed if full payment is not done.

"56" – close fiscal receipt

56,1,_____,_,_;

The command closes a fiscal receipt, but only if full payment is done.

The answer file contains the following information:

56,1,_____,_,_;Total_Receipts,Fiscal_Receipts,Reclamation_Receipts;

- Total_Receipts – total number of issued receipts (fiscal and reclamation) since the last fiscal closure;
- Fiscal_Receipts – total number of issued fiscal receipts (this is the number of the last fiscal receipt);
- Reclamation_Receipts - total number of issued reclamation receipts;

"107" – programming and deleting items, changing price for programmed items

107,1,_____,_,_;<operation type>;[set of parameters, depending on the <operation type>;];

Depending on the <operation> parameter, the command has 3 different structures:

- Programming new items - <operation type> = 1 or 2
<operation type> = 1 – duplicate programming is not allowed
<operation type> = 2 – duplicate programming is allowed

107,1,_____,_,_;<1|2>;[Tax group];[PLU];[Price];[Name];

- [Tax group] – a number, defining tax groups:
 - 1 : tax group “A”;
 - 2 : tax group “E”;
 - 3 : tax group “J”;
 - 4 : tax group “K”;
 - 5 : tax group “M”;
- [PLU] – PLU number of the item 1 – 65023;
- [Price] – default price for the item (0.01 – 999999.99);
- [Name] – name of the item, max 32 symbols;

Can be executed only after fiscal closure.

- Deleting items - <operation type> = 3

107,[logical number],_____,_,_;<3>;[ALL];
107,[logical number],_____,_,_;<3>;[PLU];

- [ALL] – if the string “ALL” is passed, the command clears all items;
- [PLU] – deletes the selected PLU number;

Can be executed only after fiscal closure.

- Change price - <operation type> = 4

107,[logical number],_____,_,_;<4>;[PLU];[New price];

- [PLU] – the item number;
- [New price] – the new price for the item;

Manage the display

"33" – clear the display

33,1,_____,_,_;

Clears the display. If there is an opened fiscal receipt and SW4 is OFF, only the bottom row is cleared.

"47" – show text on top row of the display

47,1,_____,_,_:[text];

➤ [text] is random text (20 symbols max)

If there is an opened fiscal receipt and SW4 is OFF, the command is rejected.

"35" – show text on bottom row of the display

35,1,_____,_,_:[text];

➤ [text] is random text (20 symbols max)

"63" – show date and time

63,1,_____,_,_;

Shows the current date and time on the bottom row of the display(DD.MM.YYYY. HH:MM:SS)

"100" – show text on both rows of the display

100,1,_____,_,_:[text];

➤ [text] is random text (40 symbols max)

Other commands

"60" – winter/summer time change

60,1,_____,_,_;[Flag];

- [Flag] – one digit value (0 or 1):
 - value '0' means winter time change (minus one hour);
 - value '1' means summer time change (plus one hour);

The command can be executed only 2 times per year!!!

"69" – daily fiscal closure

69,1,_____,_,_;[Type];[N][A];

- [Type] determines the report type:
 - value '0' means Z report with registry clear
 - value '2' means X report without registry clear
- [N][A] – the symbols “N” and “A”. Description:
 - if symbol “A” is present - the accumulated sold quantities of the items are cleared. The items themselves are not cleared;
 - if symbol “N” is present – prohibits the deletion of operator's data when Z report (registry clear) is executed;

"70" – internal input and output of cash

70,1,_____,_,_;[+ -][amount];

- [+ -][amount] – the sum (max 999999.99) of the input/output (the sign + or – defines if its input or output);

"106" – open the drawer

106,1,_____,_,_;

"73" – fiscal memory report by memory block number

73,1,_____,_,_;<Start_number>;<End_number>;<Options>;

- <Start_number> – digit, defines the starting record number for the report ;
- <End_number> – digit, defines the ending record number for the report;
- <Options> – digit, defining the option for the report contents:
 - 0 – prints only the number and datetime for each Z report;
 - 1 – prints total number of issued receipts for each Z report;
 - 2 – prints the total sum for each tax group for each Z report;

"79" – fiscal memory report by date

79,1,_____,_,_;<Start_date>;<End_date>;[Start_hour];[End_hour];

- <Start_date> – defines the starting date for the report (format DDMMYY);
- <End_date> – defines the ending date for the report (format DDMMYY);
- [Start_hour] – defines starting hour (if blank the start time is 00:00:00);
- [End_hour] – defines ending hour (if blank the end time is 23:59:59);

"105" – report operators

105,1,_____,_,_;

Prints informations about the sells by operator.

"111" – report items

111,1,_____,_,_;<Options>;

- <Options> – digit, defines the information to be printed:
 - 0 – only informations about sold items during the day is printed (PLU, Name, Sold quantity) ;
 - 1 – all programmed items are printed (PLU, Name, Price);

"109" – duplicate documents within period or number of document

The command has two variations, depending on the <Cmd> parameter.

I. Date range - <Cmd> parameter = 0:

109,1,_____,_,_;<Type>;<Start datetime>;<End datetime>;<Cmd>;

➤ <Type> - one or more of the following symbols can be passed:

- **A** - prints duplicate for all documents;
- **F** - prints duplicate for fiscal receipts;
- **R** - prints duplicate for reclamation receipts;
- **Z** - prints duplicate for Z reports;
- **X** - prints duplicate for X reports;
- **P** - prints duplicate for periodic reports;

e.g. "FZ" means print duplicated fiscal receipts and Z reports.

- <Start datetime> - start of the period (format DDMMYY[hhmmss]; if [hhmmss] is skipped, default time is 00:00:00);
- <End datetime> - end of the period (format DDMMYY[hhmmss]; if [hhmmss] is skipped, default time is 23:59:59);

II. Document number - <Cmd> = 1:

109,1,_____,_,_;<Type>;<Start number>;[End number];<Cmd>;

➤ <Type> - one of the following symbols can be passed:

- **F** - prints duplicate for fiscal receipts;
- **R** - prints duplicate for reclamation receipts;

- <Start number> - start number for range of documents to duplicate. If [End number] is skipped, this is the number of a single document to be printed;
- <End number> - end number for the range;

"300" – loading items from file

300,1,_____,_,_:[DeleteAll];[AllowDuplicate];[TextOnDisplay];<File name>;

- [DeleteAll] – digit, defines if all items are cleared before load:
 - 0 – items in the printer's memory are not cleared; (default value if not specified)
 - 1 – items in the printer's memory are cleared;
- [AllowDuplicate] – digit, defines if item names can be duplicated;
 - 0 – item names cannot be the same; (default value if not specified)
 - 1 – item names can duplicate;
- [TextOnDisplay] – text (max 40 symbols), shown on the display while the loading is running;
- <File name> - string, specifying the location of the file from which the items are loaded;
 - Item data structure in the file : (sample file is included in the installation);
[Tax group];[PLU];[Price];[Name]; (this row is just description, do not include it in the file)
1;1;0.01;Test item 01;
1;2;0.02;Test item 02;
3;3;0.03;Test item 03;
3;4;0.04;Test item 04;
5;5;0.05;Test item 05;

"301" – void receipt

301,1,_____,_,_;

Emergency receipt closure. If executed while fiscal receipt is opened, the command voids all sells(if any), executes payment with sum = 0.00 and closes the receipt. Nonfiscal receipts are simply closed.

The command won't be executed if there is payment already done (with sum > 0) and the payed sum is less than the whole sum of the receipt.

"305" – custom command – add new item/change price of an existing item and then sell it

The command will add new item if none with the specific PLU is found or changes the price of already existing item. After that it will sell the item.

305,1,_____,_,_;<PLU>[quantity];[percent];[Price];[Tax group>];[Item name];

- <PLU> is the PLU number of the item (max 8 digits)
 - If there is already programmed item with that PLU, and the price of that item differs from <Price>, then the <Price> will be set as new price for the item;
 - If no item with PLU is found, it will be programmed with <PLU>, <Price>, <Tax group> and <Item name>;
- [quantity] is the quantity to be sold (a number 1.000 ~ 99999.999). If you skip this parameter, the default quantity is used (1.000);
- [percent] is the discount/surcharge in percents (-99.00% ~ 99.00%) ;

The printer will not carry out this command if:

- the maximum number of sales (99) within a single receipt is already reached;
- the sum by any of the tax groups is negative;
- the sum of discounts and surcharges within the receipt is negative;
- the display is disconnected;
- you try to change the price of already sold item within the same receipt;

"350" – execute custom command

350,1,_____,_,_;<Input/OutputString>;

You can execute any of the printer's commands (as described in the firmware documentation) by assembling the command number and parameters into a string that you pass in <Input/OutputString>.

The result of the execution (data, statuses) will be saved in the answer file (see sample file "Sell_with_command_350(customCMD).txt")

Commands and parameters for MP 55 Plus - Federation of Bosnia and Herzegovina

NOTE: Parameters in < > brackets are mandatory, while those in [] brackets are non-mandatory! The brackets by themselves are **not** passed along with the data value.

Manage sells

"38" – open non-fiscal receipt

38,1,_____,_,_;

The command won't be executed if:

- there is already opened receipt(fiscal or non-fiscal);
- the clock is not set;
- the fiscal memory is not formatted;

In non-fiscal receipts you can only print non-fiscal text.

"42" – print non-fiscal text

42,1,_____,_,_:[text];

- [text] is random text (max 24 symbols)

You can print non-fiscal text only in an opened non-fiscal receipt.

"39" – close non-fiscal receipt

39,1,_____,_,_;

The command won't be executed if there is no opened receipt.

"48" – open fiscal receipt

48,1,_____,_,_;<IOSA>;<Operator>;<Password>;<TillNumber>;[ReceiptNumber];

- <IOSA> – IOSA number (max 16 digits);
- <Operator> – operator number (1-32);
- <Password> – the operator's password (4 to 8 digits);
- <TillNumber> - till number (max 5 digits);
- [ReceiptNumber] – max 6 digits. If present and greater than zero, a “Reclamation” receipt is opened and this is the number of the receipt from which the warez are returned;

The answer file contains the following information:

48,1,_____,_,_;Total_Receipts,Fiscal_Receipts,Reclamation_Receipts;

- Total_Receipts – total number of issued receipts (fiscal and reclamation) since the last fiscal closure;
- Fiscal_Receipts – total number of issued fiscal receipts (this is the number of the last fiscal receipt);
- Reclamation_Receipts - total number of issued reclamation receipts;

The command won't be executed if:

- there is already opened receipt;
- the max number of receipts per day is already issued;
- the fiscal memory is full;
- the fiscal memory is corrupted;
- one of the mandatory parameters is missing or wrong;
- the operator's password is wrong;
- the clock is not set;
- the display is not connected;

"52" – sell items and show on the display

The command has 2 variations:

I. 52,1,_____,.,.;[+ -]<PLU>[quantity];[percent];

- [+ -] <PLU> is the PLU number of the item (max 8 digits). If you pass the PLU number with a minus sign in front of it, the command will cancel the previous sale of that item (the prices of the sold/canceling items must be the same, the quantity can differ, but cannot go below the sold quantity);
- [quantity] is the quantity to be sold (a number 1.000 ~ 99999.999). If you skip this parameter, the default quantity is used (1.000);
- [percent] is the discount/surcharge in percents (-99.00% ~ 99.00%) ;

II. 52,1,_____,.,.;<VL>;

- <VL> - **void** the last item in the receipt (VL);

The printer will not carry out this command if:

- the maximum number of sales (99) within a single receipt is already reached;
- the sum by any of the tax groups is negative;
- the sum of discounts and surcharges within the receipt is negative;
- the display is disconnected

"51" – subtotal

51,1,_____,.,.;

The command shows the sum of the current sells in the receipt on the display.

"53" – payment

53,1,_____,_,_:[flag];[amount];

- [flag] – parameter that determines the type of the payment:
 - value '0' means payment in cash;
 - value '1' means payment via card;
 - value '2' means payment via cheque;
 - value '3' means payment type „Virman”;
- [amount] – the sum of the payment

The parameters [flag] and [amount] are optional and if you skip them, the command will execute payment in cash with the whole sum of the current receipt.

The command cannot be executed if :

- there is no opened receipt
- the accumulated sum is negative
- the sum for a tax group is negative
- the display is disconnected

"55" – enter client information (invoice)

55,1,_____,_,_;<IBK>;<Line 1>;<Line 2>;<Line 3>;[Line 4];[Line 5];[Line 6];

- <IBK> – exactly 13 symbols – client identification code;
- <Line 1>,<Line 2>,<Line 3> - up to 36 symbols of text each, the first three lines are mandatory;
- [Line 4];[Line 5];[Line 6]; - up to 36 symbols of text each, non mandatory parameters;

The command prints client information (up to 6 lines of text and IBK code). The IBK code and the lines of text after **full payment** is done, therefor the command won't be executed if full payment is not done.

"56" – close fiscal receipt

56,1,_____,_,_;

The command closes a fiscal receipt, but only if full payment is done.

The answer file contains the following information:

56,1,_____,_,_;Total_Receipts,Fiscal_Receipts,Reclamation_Receipts;

- Total_Receipts – total number of issued receipts (fiscal and reclamation) since the last fiscal closure;
- Fiscal_Receipts – total number of issued fiscal receipts (this is the number of the last fiscal receipt);
- Reclamation_Receipts - total number of issued reclamation receipts;

"107" – programming and deleting items, changing price for programmed items

107,1,_____,_,_;<operation type>;[set of parameters, depending on the <operation type>;];

Depending on the <operation> parameter, the command has 3 different structures:

- Programming new items - <operation type> = 1 or 2
<operation type> = 1 – PLU reprogramming is not allowed
<operation type> = 2 – PLU reprogramming is allowed

107,1,_____,_,_;<1|2>;[Tax group];[PLU];[Price];[Name];

- [Tax group] – a number, defining tax groups:
 - 1 : tax group “A”;
 - 2 : tax group “E”;
 - 3 : tax group “J”;
 - 4 : tax group “K”;
 - 5 : tax group “M”;
- [PLU] – PLU number of the item 1 – 65023;
- [Price] – default price for the item (0.01 – 999999.99);
- [Name] – name of the item, max 22 symbols;

Can be executed only after fiscal closure.

- Deleting items - <operation type> = 3

107,[logical number],_____,_,_;<3>;[ALL];
107,[logical number],_____,_,_;<3>;[PLU];
107,[logical number],_____,_,_;<3>;[FROM_PLU];[TO_PLU];

- [ALL] – if the string “ALL” is passed, the command clears all items;
- [PLU] – deletes the selected PLU number;
- if [FROM_PLU] and [TO_PLU] have values > 0 and [TO_PLU]>[FROM_PLU], then items in that range will be deleted;

Can be executed only after fiscal closure.

- Change price - <operation type> = 4

107,[logical number],_____,_,_;<4>;[PLU];[New price];

- [PLU] – the item number;
- [New price] – the new price for the item;

Manage the display

"33" – clear the display

33,1,_____,_,_;

Clears the display. If there is an opened fiscal receipt and SW4 is OFF, only the bottom row is cleared.

"47" – show text on top row of the display

47,1,_____,_,_:[text];

➤ [text] is random text (20 symbols max)

If there is an opened fiscal receipt and SW4 is OFF, the command is rejected.

"35" – show text on bottom row of the display

35,1,_____,_,_:[text];

➤ [text] is random text (20 symbols max)

"63" – show date and time

63,1,_____,_,_;

Shows the current date and time on the bottom row of the display(DD.MM.YYYY. HH:MM:SS)

"100" – show text on both rows of the display

100,1,_____,_,_:[text];

➤ [text] is random text (40 symbols max)

Other commands

"69" – daily fiscal closure

69,1,_____,_,_:[Type];

- [Type] determines the report type:
 - value '0' means Z report with registry clear
 - value '2' means X report without registry clear (default if parameter not present)

"70" – internal input and output of cash

70,1,_____,_,_:[+ -][amount];

- [+ -][amount] – the sum (max 999999.99) of the input/output (the sign + or – defines if its input or output);

"106" – open the drawer

106,1,_____,_,_;

"79" – fiscal memory report by date

79,1,_____,_,_;<Start_date>;<End_date>;[Start_hour];[End_hour];

- <Start_date> – defines the starting date for the report (format DDMMYY);
- <End_date> – defines the ending date for the report (format DDMMYY);
- [Start_hour] – defines starting hour (if blank the start time is 00:00:00);
- [End_hour] – defines ending hour (if blank the end time is 23:59:59);

"105" – report operators

105,1,_____,_,_;

Prints informations about the sells by operator.

"111" – report items

111,1,_____,_,_;<Options>;

- <Options> – digit, defines the information to be printed:
 - 0 – only informations about sold items during the day is printed (PLU, Name, Sold quantity) ;
 - 1 – all programmed items are printed (PLU, Name, Price);

"109" – duplicate documents within period

109,1,_____,_,_;<Type>;<Start datetime>;<End datetime>;

- <Type> - one or more of the following symbols can be passed:
 - **A** - prints duplicate for all documents;
 - **N** - prints duplicate for nonfiscal receipts;
 - **F** - prints duplicate for fiscal receipts;
 - **R** - prints duplicate for reclamation receipts;
 - **Z** - prints duplicate for Z reports;
 - **X** - prints duplicate for X reports;
 - **P** - prints duplicate for periodic reports;

e.g. "NFZ" means print duplicated fiscal and nonfiscal receipts and Z reports.
- <Start datetime> - start of the period (format DDMMYY[hhmmss]; if [hhmmss] is skipped, default time is 00:00:00);
- <End datetime> - end of the period (format DDMMYY[hhmmss]; if [hhmmss] is skipped, default time is 23:59:59);

If the period contains more that 100 documents, only the first 100 are printed.

"300" – loading items from file

300,1,_____,_,_:[DeleteAll];[AllowReprogram];[TextOnDisplay];<File name>;

- [DeleteAll] – digit, defines if all items are cleared before load:
 - 0 – items in the printer's memory are not cleared; (default value if not specified)
 - 1 – items in the printer's memory are cleared;
- [AllowReprogram] – digit, defines if an item with the PLU can be reprogrammed (if no sales have been made with it);
 - 0 – item with specified PLU will not be reprogrammed; (default value if not specified)
 - 1 – item with specified PLU will be reprogrammed if no sales are made with it;
- [TextOnDisplay] – text (max 40 symbols), shown on the display while the loading is running;
- <File name> - string, specifying the location of the file from which the items are loaded;
 - Item data structure in the file : (sample file is included in the installation);
[Tax group];[PLU];[Price];[Name]; (this row is just description, do not include it in the file)
 - 1;1;0.01;Test item 01;
 - 1;2;0.02;Test item 02;
 - 3;3;0.03;Test item 03;
 - 3;4;0.04;Test item 04;
 - 5;5;0.05;Test item 05;

"301" – void receipt

301,1,_____,_,_;

Emergency receipt closure. If executed while fiscal receipt is opened, the command voids all sells(if any), executes payment with sum = 0.00 and closes the receipt. Nonfiscal receipts are simply closed.

The command won't be executed if there is payment already done (with sum > 0) and the payed sum is less than the whole sum of the receipt.

"305" – custom command – add new item/change price of an existing item and then sell it

The command will add new item if none with the specific PLU is found or changes the price of already existing item. After that it will sell the item.

305,1,_____,_,_;<PLU>[quantity];[percent];[Price];[Tax group>];[Item name];

- <PLU> is the PLU number of the item (max 8 digits)
 - If there is already programmed item with that PLU, and the price of that item differs from <Price>, then the <Price> will be set as new price for the item;
 - If no item with PLU is found, it will be programmed with <PLU>, <Price>, <Tax group> and <Item name>;
- [quantity] is the quantity to be sold (a number 1.000 ~ 99999.999). If you skip this parameter, the default quantity is used (1.000);
- [percent] is the discount/surcharge in percents (-99.00% ~ 99.00%) ;

The printer will not carry out this command if:

- the maximum number of sales (99) within a single receipt is already reached;
- the sum by any of the tax groups is negative;
- the sum of discounts and surcharges within the receipt is negative;
- the display is disconnected;
- you try to change the price of already sold item within the same receipt;

"350" – execute custom command

350,1,_____,_,_;<Input/OutputString>;

You can execute any of the printer's commands (as described in the firmware documentation) by assembling the command number and parameters into a string that you pass in <Input/OutputString>.

The result of the execution (data, statuses) will be saved in the answer file (see sample file "Sell_with_command_350(customCMD).txt")

Commands and parameters for FP550, FP1000 - Montenegro

Manage sells

"38" – open non-fiscal receipt

38,[logical number],_____,_,_;

The command won't be executed if there is already opened receipt. In non-fiscal receipts you can only print non-fiscal text.

"42" – print non-fiscal text

42,[logical number],_____,_,_:[text];

- [text] is random text (max 30 symbols)

You can print non-fiscal text only in opened non-fiscal receipt.

"39" – close non-fiscal receipt

39,[logical number],_____,_,_;

The command won't be executed if there is no opened receipt.

"48" – open fiscal receipt

48,[logical number],_____,_,_:[operator];[password];

- [operator] is the operator number (1-16)
- [password] is the password (6 digits) for the operator

The command won't be executed if there is already opened receipt/invoice.

"52" – sell items

52,[logical number],_____,_,_:[+ - PLU];[price];[quantity];[flag];[amount];

- [+ - PLU] is the PLU number of the item 1 – 65023. If you pass the PLU number with a minus sign in front of it, the command will cancel the previous sale of that item (the prices of the sold/canceling items must be the same, the quantity can differ, but cannot go below the sold quantity);
- [price] is the price of a single item. If you sell with price = 0, then the item's programmed price is used
- [quantity] is the quantity sold (a number 0.900 ~ 99999.999);
- [flag] is a number that means:
 - value '0' – surcharge in percent (max 99.00%)
 - value '1' – discount in percent (max 99.00%)
 - value '2' – surcharge in sum (max 8 digits)
 - value '3' – discount in sum (max 8 digits)
- [amount] is the sum of the discount/surcharge in percent or sum (depending on the [flag] parameter)

The printer will not carry out this command if:

- the maximum number of sales (99) within a single receipt is already reached;
- the sum by any of the tax groups is negative;
- the sum of discounts and surcharges within the receipt is negative;
- the display is disconnected

"51" – subtotal

51,[logical number],_____,_,_:[Print];[Display];[Flag];[Amount];

- [Print] – parameter that determines if the sum of the subtotal will be printed out:
 - value '0' – do not print
 - value '1' – print
- [Display] – parameter that determines if the sum of the subtotal will appear on the display:
 - value '0' – don't show on display
 - value '1' – show on display
- [Flag] – parameter that determines the type of the subtotal:
 - value '0' means surcharge in percent (max 99%)
 - value '1' means discount in percent (max 99%)
- [Amount] – the percent of the discount/surcharge

"53" – payment

53,[logical number],_____,_,_:[flag];[amount];

- [flag] – parameter that determines the type of the payment:
 - value '0' means payment in cash
 - value '1' means payment via credit
 - value '2' means payment via cheque
 - value '3' means payment via debit card
 - FP1000 also supports values 4 (“virman”) and 5 through 9 for additional types of payment;
- [amount] – the sum of the payment

The parameters [flag] and [amount] are optional and if you skip them, the command will execute payment in cash with the whole sum of the current receipt.

The command cannot be executed if :

- there is no opened receipt
- the accumulated sum is negative
- the sum for a tax group is negative
- the display is disconnected

"54" – print fiscal text

54,[logical number],_____,_,_:[text];

- [text] is random text (max 30 symbols)

"56" – close fiscal receipt

56,[logical number],_____,_,_;

The command closes a fiscal receipt, but only if payment is done.

"57" – cancel current fiscal receipt

57,[logical number],_____,_,_;

The whole fiscal receipt will be canceled and closed as non-fiscal. This command will work only if no payments have been made yet.

"107" – programming and deleting items, adding quantity to programmed items

107,[logical number],_____,_,____;[operation type];[different number of optional parameters, depending on the type of operation];

Depending on the [operation] parameter, the command has 3 different structures:

- [operation type] = 1 – programming new items;

107,[logical number],_____,_,____;1;[Tax group];[PLU];[Price];[Amount];[Name];

- [Tax group] – a number (1 – 8), corresponding to A – H tax groups
- [PLU] – PLU number of the item 1 – 65023
- [Price] – default price for the item
- [Amount] – available quantity for the item
- [Name] – name of the item, 24 symbols (FP550), 36 symbols (FP1000)

Can be executed only after fiscal closure.

- [operation type] = 2 – deleting items;

107,[logical number],_____,_,____;2;[PLU1];[PLU2];

- [PLU1] – PLU of the item to be deleted. If [PLU2] is not zero, this is the starting number of the range from [PLU1] to [PLU2]
If [PLU2] is zero, only the item defined by this parameter is deleted
- [PLU2] – ending range for the deletion. If this parameter is 0, only the item defined by [PLU1] is deleted

Can be executed only after fiscal closure.

- [operation type] = 3 – adding additional available quantity of an item;

107,[logical number],_____,_,____;3;[PLU];[Amount];

- [PLU] – the item number
- [Amount] – the quantity to be added for the item

"109" – duplicate receipt

109,[logical number],_____,_,____;

This command must be executed only after the last printed receipt is closed.

Manage the display

"33" – clear the display

33,[logical number],_____,_,_;

"47" – show text on top row of the display

47,[logical number],_____,_,_:[text];

- [text] is random text (20 symbols max)

"35" – show text on bottom row of the display

35,[logical number],_____,_,_:[text];

- [text] is random text (20 symbols max)

"63" – show date and time

63,[logical number],_____,_,_;

"100" – show text on both rows of the display

100,[logical number],_____,_,_:[text];

- [text] is random text (40 symbols max)

Other commands

"69" – execute reports

69,[logical number],_____,_,_;[flag];

- [flag] determines the report type:
 - value '0' means Z report with registry clear
 - value '1' means X report without registry clear

"70" – internal debiting and crediting (cash in/out)

70,[logical number],_____,_,_;[flag];[amount];

- [flag] – determines the type of operation:
 - value '0' means cashing in / debit
 - value '1' means cashing out / credit
- [amount] – the sum of the debit/credit

"106" – open the drawer

106,[logical number],_____,_,_;

"79" – annual / monthly short report

79,[logical number],_____,_,_;[Year];[Month];

- [Year] – defines the year (format 'YY');
- [Month] – defines the month (format 'MM');

If the month parameter is empty or 0, an annual report is executed.

"94" – annual / monthly detailed report

94,[logical number],_____,_,_;[Year];[Month];

- [Year] – defines the year (format 'YY');
- [Month] – defines the month (format 'MM');

If the month parameter is empty or 0, an annual report is executed.

Common commands and parameters

S - sale of an item

S,[logical number],_____,_,_:[item];[price];[quantity];[stand];[item group];[tax group];0;0;

* [item] is the name of the item (up to 19 symbols for ECR and up to 20 for FP, though it may vary for different devices);

* [price] is the price of a single item (0 ~ 999999.99 for ECR and -999999.99 ~ 99999.99 for FP; the negative price is used for voiding sales);

* [quantity] is the quantity sold (a number 0 ~ 99999.999);

* [stand] is the stand number (a number 1 ~ 9);

* [item group] is the number of the item group (a number 1 ~ 99);

- [tax group] is the tax group of the item (1 ~ 8 for FP and 1 ~ 4 for ECR);

FP will not carry out this command if:

* the maximum number of sales (99) within a single receipt is already reached;

* the sum by any of the tax groups is negative;

* the sum of discounts and surcharges within the receipt is negative;

In each of the cases the result of executing the command will be "Er".

Important remarks:

(Only for Serbian devices S,[logical number],_____,_,_:[PLU];:[price];[quantity];;;;;;)

{Command S is not available for FP550 Republica Srpska. See command „R“}

{Command S is not available for FP550 Bangladesh, FP550 Albania. See command“ 48”, „49“}

IMPORTANT!!! { for Albanian ECRs - DP50D, MP55LD, DP500 } :

The ECR can work with or without decimal separator (programming option 2, table 4, row 17 – if its value is **0** then it works without decimal separator, if its value is **1** then it works with decimal separator).

When working in mode WITH decilal separator – In order to sell with real numbers, you must pass the [price] with extra 2 digits at the end, defining the fraction of the number. For example, if you want to sell one item with price 1.34, you pass 134 in the [price] parameter:

S,1,_____,_,_;Item;**134**;1.000;1;1;1;0;0; - ECR will sell with price = 1.34

When working in mode WITHOUT decilal separator - you must pass only integer values to the [price] parameter. You can sell only with **integer values**, DO NOT ADD 2 DIGITS LIKE IN THE PREVIOUS MODE (with decimal separator).

If you send the previous example when working in this mode, you will sell the item with price, equal to 134:

S,1,_____,_,_;Item;**134**;1.000;1;1;1;0;0; - ECR will sell with price = 134

NOTE for DP500, DP50, DP50D – Latvia:

If the first sell is made with negative price and quantity, a storno receipt is opened. You can sell only with negative prices and quantities in a storno receipt.

NOTE for DP 50, DP 500, MP55LD – Albania:

Deep void of a sale – voids the sale plus the discount or surcharge made on that item. This can be done by repeating the S command, but placing the “-” sign in front of the **[quantity]**.

Example: S,1,_____,_____;Test;10;1.000;1;1;1;0;0; *this is the sell*
 C,1,_____,_____;0;10;;; *this is 10% surcharge on the sell*
 S,1,_____,_____;Test;10;-1.000;1;1;1;0;0; *this is the full void*
 Total sum to be payed = 0

Refund of an item (void or cancellation) – voids the last sell and you can make additional discount/surcharge on the refund sum. This can be done by repeating the S command, but placing the “-” sign in front of the **[price]** (or in front of both **price AND quantity**).

Example: S,1,_____,_____;Test;10;1.000;1;1;1;0;0; *this is the item sale*
 C,1,_____,_____;0;10;;; *this is 10% surcharge on the sale*
 S,1,_____,_____;Test;-10;1.000;1;1;1;0;0; *this is the reversal*
 C,1,_____,_____;1;10;;; *this is 10% discount on the refund*
 Total sum to be payed = 2 (cause there was a discount on the refund)

E - sale of an item with departments

{Command „E" is available for bulgarian DV, KL devices and DP15-Armenia.}

E,[logical number],____,_,_:[item];[price];[quantity];[stand];[item group];[department number];0;0;

- * [item] is the name of the item;
- * [price] is the price of a single item (0 ~ 999999.99 for ECR and -999999.99 ~ 99999.99 for FP; the negative price is used for voiding sales);
- * [quantity] is the quantity sold (a number 0 ~ 99999.999);
- * [stand] is the stand number (a number 1 ~ 9);
- * [item group] is the number of the item group (a number 1 ~ 99);
- * [department number] is the department number from 1 to 50;

FP will not carry out this command if:

- * the maximum number of sales (99) within a single receipt is already reached;
- * the sum by any of the department numbers is negative;
- * the sum of discounts and surcharges within the receipt is negative;

In each of the cases the result of executing the command will be "Er".

M – open new invoice {Only for DP 50, DP 500, MP55LD Albania}

M,[logical number],____,_,_:[invoice number];

*[invoice number] is the invoice number (0 to 9 digits, allowing max number of 999999999)

The command will **not** be carried out if there is an open receipt.

R - sale of an item : {Only for FP 550 Republica Srpska}

R,[logical number],____,_,_:[PLU];[Quantity];[Storno];

* [PLU] is the item number in the printer(negative sign for voiding)

* [quantity] is the quantity sold (a number 0 ~ 99999.999);

* [Storno] is a number (0 or 1) – if its „0“ a normal receipt is opened, if its „1“ a storno receipt is opened

G – Save an item into the printer : {Only for FP 550 Republica Srpska}

G,[logical number],____,_,_:[PLU];[Name];[VAT group];[SPrice];

* [PLU] is the item number

* [Name] is the item name, maximum 32 chars.

* [VAT group] – 4 VAT groups available – 0,1,2,3 (corresponds to A,E,J,K)

* [SPrice] – single price for the item

K – Delete items from the printer : {Only for FP 550 Republica Srpska}

K,[logical number],____,_,_:[PLU];[All];

* [PLU] is the item number to be deleted (empty if you are deleting all items)

* [All] – the letter „A“ at this position deletes all items

T - end of receipt or payment

**** end of receipt:***

T,[logical number],_____,_,_;

Payment in cash is made for the whole sum, together with closure of the fiscal receipt. With MP-50 and MP-55 this command also closes an official receipt.

**** payment:***

T,[logical number],_____,_,_;[code];[sum];;;;

* [code] is the payment code:

For ECRs - 0,1,2,3, or 4; numbers from 0 to 3 correspond to payment in cash, on credit, check and credit card payment;

Additional codes for **DP500 Latvia**:

8 – payment in secondary currency, change in main currency;

9 – payment in secondary currency, change in secondary currency;

For FPs - 0,1,2,3,4, 5,6,7,8; numbers from 0 to 3 correspond to payment in cash, with credit card, check, debit credit card payment; codes 6,7,8,9 are used for additional payment types;

Code 5 **for FP 550 Republica Srpska** closes storno receipts.

Subtotal is calculated with 4;(For Serbian devices - [code] with value 0 do not work).

* [sum] is the sum to be paid;

Payment is made with the indicated sum and payment type, and if the paid sum is larger than the sum due for payment, the receipt is closed. Unless this happens, what can be executed are only this command and the print text command. When a discount/surcharge must be made on the sum accumulated to the moment (subtotal), the command is sent for with code 4.

C - discount/surcharge in percents

C,[logical number],_____,_,_:[type];[amount];;;;

{Command „C" is not available for FP550 Republica Srpska.}

* [type] - one number with a value 0 (surcharge) or 1 (discount);

NOTE: There are additional values for DP500 plus, DP55 plus, MP55 plus – Romania and Moldova and for DP15 Armenia:

* value 2 – surcharge by sum

* value 3 – discount by sum

* [amount] - the amount of the surcharge/discount in percents (0 ~ 99.99) or if you use types 2 or 3 (see the above **NOTE**) – this is the actual sum of the surcharge/discount (the discount cannot be more than the sum of the last sale);

If prior to this command a payment is made with parameter 4, a discount/surcharge will be made on the subtotal. Otherwise, the discount/surcharge is made on the sum of the last sale. MP-50 and MP-55 carry out a discount/surcharge on subtotal only. With the FPs this command cannot be executed more than once on one and the same sale or subtotal. In this case, FprintWin will do only the first discount/surcharge and will stop whenever it meets an invalid C command.

NOTE for FP550 Bangladesh – use the discount/surcharge build in command 49 (for each single sale) and command 51 (for subtotal). Command “C” still works, but it doesn't support discounts/surcharges by sum, only in percent.

P - print text

P,[logical number],_____,_,_;[line 1];[line 2];[line 3];[line 4];[line 5];

If the line is empty, it is not printed out. If it contains only spaces, it will be printed as an empty line. MP-50 and MP-55 print out only the first line. The maximum number of symbols per line is 24 for ECR and 30 for FP.

I - official debiting / crediting

I,[logical number],_____,_,_;[type];[sum];;;;

* [type] is 1 number with a 0 value (debit) or 1 (credit);

Additional types for **DP500 Latvia**:

2 – debit in secondary currency

3 – credit in secondary currency

* [sum] is the sum of the debit/credit in the ECR / FP;

F - allows keyboard input:

F,[logical number],_____,_,_;

H - forbids keyboard input:

H,[logical number],_____,_,_;

Y - opening non-fiscal receipt

Y,[logical number],_____,_,_:[line 1]; [line 2];[line 3]; line 4]; line 5];

An official receipt is opened and only the first line is printed. In the official receipt what can be carried out is only the P command (printing of text) and the T command (closing the official receipt).

For newer ECRs ('plus', DV, KL series) and all FP's, the command does not print text, just opens non-fiscal receipt.

Note for Albanian ECRs (DP50D, DP 500, MP55L) – use command Y for printing nonfiscal text instead of P command.

B - beep command for ECR :

B,[logical number],_____,_,_;

Z – fiscal closure

Z,[logical number],_____,_,_;

Generates a daily financial report and fiscal closure.

Cancels the entire fiscal receipt for ECR MP56 (Lietuva). The cancel command is performed if:

- there is an open fiscal receipt
- there was no %- / %+ on subtotal
- payment has not started

For fiscal printers, the financial report is preceded by electronic journal erase. This command should be executed only when there are no opened receipts.

SYNTAX for DP 50, DP 500, MP55LD – Albania:

Z,[logical number],_____,_,_:[type];

*[type] is number value - type of report :

0 : executes X report

1 : executes Z report

2 : clears the archive – this option is useless if the ECR settings “type of archive” – table 2, field 5 is with value 0)

SYNTAX for DP 500 – Latvia (not for “plus” ECRs):

Z,[logical number],_____,_,_:[type];

*[type] is number value - type of report :

0 : executes X report

1 : executes Z report

SYNTAX for devices:

DP 500 plus, DP55 plus, MP55 plus – Romania and Moldova,

DP 500 plus, DP55 plus, MP55 plus - Latvia

Z,[logical number],_____,_,_;[type];[Start date];[End date];

*[type] is number value - type of report :

0 : executes X report;

1 : executes Z report;

2 : executes short report from-to date;

3 : executes detailed report from-to date;

*[Start date] – if [type] is 2 or 3 – this defines the starting date (in format “DDMMYY”);

*[End date] – if [type] is 2 or 3 – this defines the ending date (in format “DDMMYY”);

Date range reports can be executed only on fiscalized printer and after at least one Z report.

SYNTAX for DP15 Armenia:

Z,[logical number],_____,_,_;[type];[Year];[Month];

*[type] is number value - type of report :

0 : executes X report;

1 : executes Z report;

2 : executes short report;

3 : executes detailed report ;

*[Year] – if [type] is 2 or 3 this parameter defines the year (format YY);

*[Month] – if [type] is 2 or 3 this parameter defines the month (format MM) – if skipped, a year report is printed;

D - receipt duplicate

D,[logical number],_____,_,_;

{Command „D" is not available for FP550 Republica Srpska.}

Prints a duplicate of the last fiscal receipt.

O – open drawer

{supported in fiscal printers only – FP300, FP1000, FP550}

O,[logical number],_____,_,_;

The command opens the drawer (if it's connected to the printer).

L – sending text to the printer's display

L,[logical number],_____,_,__,[Command];[View type];[Text];

The [Command] parameter can have the following values:

- 0 – clears both rows of the display
- 1 – clears the top row of the display
- 2 – clears the bottom row of the display
- 3 – prints [Text] to the top row of the display
- 4 – prints [Text] to the bottom row of the display
- 5 – prints [Text] to both rows of the display
- 6 – prints date and time to the bottom row of the display

The [View type] parameter can have the following values:

- 0 – the [Text] is printed on the display at once
- 1 – the [Text] is floating(from right to left) on the display

The [Text] parameter contains the text that is to be shown on the display (the display can show 20 characters on each row at once, larger text is printed in series or its floating) – maximum 200 symbols.

V – immediate void

{Command available only for DP 50, DP 500, MP55LD - Albania and DP500, DP50, DP50D - Latvia}

V,[logical number],_____,_,_;

After the execution the previous operation will be annulled:

- sold item with/without surcharge/discount,
- refunded item,
- surcharge/discount over a refunded item,
- surcharge/discount over the subtotal.

The command could be sent repeatedly, annulling all of the sales in the receipt.

Before the execution the receipt must be opened but the payment operations should not be started.

J – set date and time {Only for Albanian ECRs}

J,[logical number],_____,_,_;[Day];[Month];[Year];[Hour];[Minute];

The parameter for year is in short time format (e.g 2009 is 09);

Example: J,1,_____,_,_;22;10;09;14;44;

A – print barcode

(this command is currently supported only for bulgarian FP300, FP1000)

84,[logical number],_____,_,_;[type];[value];

* [type] is a number that defines the barcode type:

1 – EAN8

2 – EAN13

3 – Code 128

4 – ITF

5 – ITF (Automatic control sum printing and generation)

* [value] is the barcode value to be printed. Depending on the barcode type it has variable size (EAN8 is only 7 digits, EAN13 is 12 digits and Code128 is between 9 and 18 symbols, ITF is between 2 and 5 digits)

Printing barcode can be done only in opened receipts (nonfiscal, fiscal or exchange)

X – cancel current fiscal receipt

(this command is currently supported only for bulgarian FP60, FP300, FP1000, TM-T260 and DP 500 plus – Romania, DP15 - Armenia)

X,[logical number],_____,_,_;

The whole fiscal receipt will be canceled and closed as non-fiscal. This command will work only if no payments have been made yet.

48 – open fiscal receipt

{Command supported for bulgarian DV and KL devices and for DP15 - Armenia}

48,1,_____,_,____;[operator];[password];[workplace];[open invoice];

- [operator] is the operator number (reffer to the device manual those numbers);
- [password] is the operator's password;
- [workplace] is the work place for the operator;
- [open invoice] – 0 or 1, if 1 – opens invoice receipt. This parameter is relevant only for bulgarian devices;

Command won't execute if:

- there is an open receipt;
- clock is not set;

58 – sale of programmed item

{ Command supported for bulgarian DV and KL devices and for DP15 - Armenia }

58,1,_____,_,____;[code];[department];[quantity];[percent];[sum];[display];
[open invoice];

- [code] is the number of the item to be sold;
- [department] is the department number (if 0 the programmed Tax group is used instead);
- [quantity] is the quantity to be sold (до 99999.999);
- [percent] discount/surcharge in % (+- 99%);
- [sum] discount/surcharge by sum;
- [display] is 0 or 1 – if 1 the sale is shown on the display;
- [отвори фактура] is 0 or 1 – if 1 opens invoice. Only for bulgarian devices.

NOTE: If you don't open receipt with cmd 48 before selling, this command opens receipt with operator number 1 and his/hers password, which should be set in the program's settings field “Operators password” and should also be the same in the device.

105 – operators report

{ Command supported for bulgarian DV and KL devices and for DP15 - Armenia }

105,1,_____,_,_;

Prints report for the sales by operator.

107 – program and delete items

{ Command supported for bulgarian DV and KL devices and for DP15 - Armenia }

107,1,_____,_,_:[operation];....parameters...

*[operation] is a value of 1 to 4:

Value 1 – program items. Syntax:

107,1,_____,_,_;1;[Tax group];[code];[price];[name];[stock group];[+ - quantity];
[replace];

- [Tax group] is the tax group (1-8 corresponds to A,B,C...);
- [code] is the item number;
- [price] is the price for the item;
- [name] is the name of the item;
- [stock group] is the stock group number of the item;
- [+ - quantity] is the available quantity for the item. If [replace] = 1, then this quantity replaces the current in the printer, otherwise its added/subtracted to/from the quantity in the printer;
- [replace] is 0 or 1 – see above;

Value 2 – delete items. Syntax:

107,1,_____,_,_;2;[all];[code 1];[code 2];

- [all] is 0 or 1 – if 1 then all items are deleted;
- [code 1] is the number of the item to be deleted;
- [code 2] – if code 1 and 2 are numbers greater than 0, then all items in range (code1 to code 2) are deleted;

...(continues on the next page)

Value 3 – add/subtract quantity. Syntax:

107,1,_____,_,_;3;[code];[+ - quantity];

- [code] is the item number;
- [+ - quantity] is the quantity to be added/subtracted to the current in the printer;

Value 4 – read item data. Syntax:

107,1,_____,_,_;4;[code];

- [code] is the number of the item;

The answer file contains the data for the item in this format:

107,1,_____,_,_;(code);(tax grp);(stock grp);(price);(total by sells);(sold quantity);
(available quantity);(name);

111 – items report

{ Command supported for bulgarian DV and KL devices and for DPI5 - Armenia }

111,1,_____,_,_;[code];[start number];[end number];[stock group];

- [code] is 0 or 1 – if 0 prints only items with sales made, if 1 – prints all items;
- [start number], [end number] defines the range of item numbers;
- [stock group] – prints only items in this stock group;

Working with FPrint WIN - running FPrintWIN from other applications

The program can be started with the following parameters:

FPRINT [port] [speed] [file] (serial number) (dont show messages in windows)

There is additional parser for Albanian FP2000 for TCPIP communication:

{FPRINT [IP] [Port] [file] (serial number) (dont show messages in windows)}

[port] - set the number of the serial port to which is connected the respective ECR/FP (for example COM 1 or 1). If you don't set this parameter, the default port is the one you selected in the program settings for the device.

[speed] - this field must contain the communication speed set in the ECR/FP. If you do not set this parameter, the default speed is the one set in the program settings (baud rate) for the device.

[IP] – IP address of the printer (eg. 192.168.0.22). If you don't set this parameter, the default IP is the one you selected in the program settings for the device.

[Port] – the listening port of the printer. If you don't set this parameter, the default port is the one you selected in the program settings for the device.

[file] - the field contains the name of the input (executable) file. The default file is the one set in the program settings for the device.

Field **(serial number)** contains the serial number of the fiscal device. In case the computer needs to control more than one fiscal device, You must enter the fourth parameter. If it is entered, You must enter all previous parameters!

Field **(dont show messages in windows)** allows you to turn off error pop-up windows. The field is not obligatory and has values “0” or “1”. If you set it with value “1” (and provide all 4 previous parameters), then the errors will not pop-up, but will be saved in the log file (Fprint_log.txt). See section [File format](#) for message texts description.

If you control more then one fiscal device, but enter from 1st to 3rd parameter the program will execute the file onto the last registered device.

To execute the order, you must start "FPrint WIN", while using it from your programs, with at least one parameter. Otherwise, if you start the program with no parameter, you get the opportunity to adjust the settings.

"FPrint WIN" is distributed along with a sample program("FPExample.exe"), as well as with sample files for each device. What you can see below is a typical example of executing an order from the command line or under DOS (you can create a BAT file and execute it).

```
C:\PROGRA~1\DATECS~1\FPrint\FPrint.exe COM2 9600
```

```
C:\PROGRA~1\DATECS~1\FPrint\MP55_E~1.INP
```

Fiscal devices setup

MP5000



Allow "fiscal printer" mode:

In table 4, line 4 is recorded a key number which you can receive from DATECS. This is a single procedure! Thereafter the ECR can be used in "fiscal printer" mode;

Switching the cash register to "fiscal printer" mode:

From OIIP____ mode (after pressing the[+ %] button twice), press the [.] button; the display shows [--FP-- 0]. Now the ECR is in "fiscal printer" mode and is ready to work with FPRINT. To exit the "fiscal printer" mode, click [MODE];

MP-50



To change the ECRs' configuration, first they need to be cleared.

Clear ECR:

Entering the "Clear" mode is done from "OFF" status after pressing the numeric key "3" and setting the operator's password from number 13 to number 16. Press "TOTAL". Then press "TOTAL" or the "PLC" and "1" buttons, which generates a printout of the electronic journal and daily financial report.

When the electronic journal is already printed, the operator must confirm the clear. The display shows a message "C - 0" - the operator should press the respective key. To confirm the clear, press the "0" key. Pressing "C" cancels the operation.

Programming the fields:

To enter the "Programming" (PGM) mode, set the device in "OFF" status and press the numeric key "4". Set the operator's password from number 15 to number 16 and press "TOTAL".

The programming of the memory is selected by pressing the "1" key. All the parameters that can be programmed are arranged in tables. Each table consists of a fixed number of lines and each line consists of fields.

2. 1. 1. 2.

[table number].[Line number].[Field number].[Number of symbols]

In the programming mode you can set all the parameters that are necessary for the cash register to work properly. With the help of the functional keys (according to their definition) you can go to a field and, using the information keys, set the wanted value. Press "TOTAL" to

save the data input.

Q'TY - go to the next table. After a table of the highest number follows a table of the smallest number.

%+ - go to a line of a higher number;

%- - go to a line of a smaller number;

PRC - go to a field of a higher number;

VD - go to a field of a smaller number;

TOTAL - save the entered information (only when in "field definition" mode);

STL - alternative shift to "address/field definition" modes;

CRD - print out the entered information or the field entry.

The fields that must be programmed are:

Table 2:

Field 1 /ECR logical number/,

Field 8 /value 1 or 2/,

Field 9 /baudrate/

3 - 4800 bps;

4 - 9600 bps;

Mode R - "Sales":

Enter the mode from "OFF" status by pressing the "1" numeric key and with the operator's password (from number 13~16), and press "TOTAL".

MP-55, MP55M, MP55L, MP55B



To change the ECRs' configuration, first they need to be cleared.

Clear ECR:

Entering the "Clear" mode is possible when in "OFF" status, after pressing the numeric key "3" and setting the operator's password from number 27 to number 30 (30 for Serbian devices). Then press "TOTAL" twice, which generates a printout of the electronic journal and the daily financial report.

When the electronic journal is already printed, the operator must confirm the clear. The display shows a message "C - 0" - the operator should press the respective key. To confirm the clear, press the "0" key. Pressing "C" cancels the operation.

Programming the fields:

To enter the "Programming" (PGM) mode, set the device in "OFF" status and press the numeric key "4". Set the operator's password from number 29 to number 30 (30 for Serbian devices) and press "TOTAL".

The programming of the memory is selected by pressing the "1" key. All the parameters that can be programmed are arranged in tables. Each table consists of a fixed number of lines and each line consists of fields.

2. 1. 1. 2.

[Table number].[Line number].[Field number].[Number of symbols]

In the programming mode you can set all the parameters that are necessary for the cash register to work properly. With the help of the functional keys (according to their definition) you can go to a field and, using the information keys, set the wanted value. Press "TOTAL" to save the data input.

X - go to the next table. After a table of the highest number follows a table of the smallest number.

%+ - go to a line of a higher number;

%- - go to a line of a smaller number;

PRC - go to a field of a higher number;

VD - go to a field of a smaller number;

TOTAL - save the entered information (only when in "field definition" mode);

STL - alternative shift to "address/field definition" modes;

PY - print out the entered information or the field entry.

The fields that must be programmed are:

Table 2:

Field 1 /ECR logical number/,

Field 8 /3/(note : for MP55L, MP55LD{Albania} – this value must be „2“)

Field 9 /baudrate/

3 - 4800 bps; (for MP55L value 1 = 4800 bps)

4 - 9600 bps; (for MP55L value 4 = 38400 bps)

Table 4

Field 1, line 1 and line 2 /value 1/ - permits a surcharge/discount in percents.

Mode R - "Sales":

Enter the mode from "OFF" status by pressing the "1" numeric key and with the operator's 1 to 30 password and press "TOTAL".

DP-50, DP-50D, DP 500



To change the ECRs' configuration, first they need to be cleared.

Clear ECR:

Entering the "Clear" mode is possible when in "OFF" status, after pressing the numeric key "3" and setting the operator's password from number 27 to number 30 (30 for Serbian devices). Then press "TOTAL" twice, which generates a printout of the electronic journal and the daily financial report.

When the electronic journal is already printed, the operator must confirm the clear. The display shows a message "C - 0" - the operator should press the respective key. To confirm the clear, press the "0" key. Pressing "C" cancels the operation.

Programming the fields:

To enter the "Programming" (PGM) mode, set the device in "OFF" status and press the numeric key "4". Set the operator's password from number 29 to number 30 (30 for Serbian devices) and press "TOTAL".

The programming of the memory is selected by pressing the "1" key. All the parameters that can be programmed are arranged in tables. Each table consists of a fixed number of lines and each line consists of fields.

2. 1. 1. 2.

[Table number].[Line number].[Field number].[Number of symbols]

In the programming mode you can set all the parameters that are necessary for the cash register to work properly. With the help of the functional keys (according to their definition) you can go to a field and, using the information keys, set the wanted value. Press "TOTAL" to save the data input.

X - go to the next table. After a table of the highest number follows a table of the smallest

number.

%+ - go to a line of a higher number;

%- - go to a line of a smaller number;

PRC - go to a field of a higher number;

VD - go to a field of a smaller number;

TOTAL - save the entered information (only when in "field definition" mode);

STL - alternative shift to "address/field definition" modes;

PY - print out the entered information or the field entry.

The fields that must be programmed are:

Table 2:

Field 1 /ECR logical number/,

Field 8 /3/ {for DP-50D,DP-500 Albania – the value is currently 2}

Field 9 /baudrate/

1 - 4800 bps;

2 - 9600 bps;

3 – 19 200 bps;

4 – 38 400 bps;

Table 4

Field 1, line 1 and line 2 /value 1/ - permits a surcharge/discount in percents.

Mode R - "Sales":

Enter the mode from "OFF" status by pressing the "1" numeric key and with the operator's 1 to 30 password and press "TOTAL".

MP-500,MP-500T,MP-500TR



Clear ECR:

To enter in "Clear" mode, switch the key to "Z" position, press the "PLU" key and "1" key. To generate a detailed report press "0", and to get a short report press "1". When the report is ready, the operator must confirm the clear. The indication on the display reads "Ñ - 0": "C" cancels the clear, "0" confirms the operation.

Programming the fields:

To enter the "Programming" (PGM) mode, set the key in "PGM" position, only for an ECR with cleared memory. Select programming of the memory by pressing "1" on the numeric keyboard.

Functional keys:

X - go to the next table. After a table of the highest number follows a table of the smallest number.

%+ - go to a line of a higher number;

%- - go to a line of a smaller number;

PRC - go to a field of a higher number;

VD - go to a field of a smaller number;

TOTAL - save the entered information;

SÂTL - alternative shift to "address/field definition" modes;

CÀRD - print out the entered information or the field entry.

The fields that must be programmed are:

Table 2:

Field 1 /ECR logical number/,

Field 8 /value 3/,

Field 9 /baudrate/

3 - 4800 bps;

4 - 9600 bps;

Table 4

Field 1, line 1 and line 2 /value 1/ - permits a surcharge/discount in percents.

Table 5

Field 7 and field 8 /value 0/

Mode R - "Sales":

To enter the mode, you must:

1. Set the key to "REG";
2. Enter the operator's password;
3. Press "TOTAL".

Samsung ER250F



Clear ECR:

To enter into "Clear" mode, switch the key to "Z" position and press "1". Press "0" to generate a detailed report, and "1" to generate a short report. When done, the operator must confirm the clear. The indication on the display will read "Ñ - 0", where "C" cancels the clear and "0" confirms the operation.

Programming the fields:

To enter the "programming mode" (PGM), set the switch key to PGM position, only for a cleared ECR. Select programming of the memory with "1".

Functional keys:

X - go to the next table. After a table of the highest number follows a table of the smallest number.

%+ - go to a line of a higher number;

%- - go to a line of a smaller number;

VD- go to a field of higher number;

TAX- go to a field of a smaller number;

AMD/TEND - save the entered information;

CHECK - alternative shift to "address/field definition" modes;

CHARGE - print the entered information or the field entry.

The fields that must be programmed are:

Table 2:

Field 1/ECR logical number/,

Field 8 /value 6/,

Field 9 /baudrate/.

3 - 4800 bps;

Mode R - "Sales":

To enter the mode you must :

1. Set the key to "REG" position;
2. Enter the operator's password;
3. Press "TOTAL".

List of executable commands by devices

MP50, MP55, MP55B



Executable commands :

S, F, H, C (only on subtotal, i.e. after command *T* containing parameter 4), **P, T, Y, B.**

Example :

```
H,1,_____,__,_;  
S,1,_____,__,_;Cabbage;0.05;1.000;1;1;2;0;0;  
S,1,_____,__,_;Gherkins;0.05;1.000;1;1;2;0;0;  
S,1,_____,__,_;Potatoes;0.02;1.000;1;1;2;0;0;  
S,1,_____,__,_;Printer;0.05;3.000;1;1;2;0;0;  
T,1,_____,__,_;4;;;;;  
C,1,_____,__,_;1;10.00;;;;  
P,1,_____,__,_; ;;;;;  
P,1,_____,__,_;Is this a fiscal printer;;;;;  
P,1,_____,__,_;or a cash register?;;;;;  
P,1,_____,__,_; ;;;;;  
T,1,_____,__,_;  
Y,1,_____,__,_;Official receipt;;;;;  
P,1,_____,__,_;In the official receipt;;;;;  
P,1,_____,__,_; only P (text print);;;;;  
P,1,_____,__,_;and T (closing of official ;;;;;  
P,1,_____,__,_;receipt) commands can be executed. ;;;;;  
T,1,_____,__,_;  
F,1,_____,__,_;
```

(For Serbian Devices)

Executable commands : **S, T, C, P, I, H, F**

Example :

H,1,_____,_,_;

S,1,_____,_,_;2;;0.34;3.123;;;;;

C,1,_____,_,_;1;40.00;;;;

S,1,_____,_,_;7;;3.10;3.123;;;;;

P,1,_____,_,_;1111111;22222222;3333333;444444;555555;

T,1,_____,_,_;4;;;;;

C,1,_____,_,_;0;98.99;;;;

T,1,_____,_,_;4;;;;;

C,1,_____,_,_;1;98.99;;;;

S,1,_____,_,_;2;;0.10;3.005;;;;;

T,1,_____,_,_;1;0.05;;;;

T,1,_____,_,_;2;0.05;;;;

T,1,_____,_,_;3;0.05;;;;

T,1,_____,_,_;

P,1,_____,_,_;test1 ;test2 ;test3 ;test test4 ;test5;

S,1,_____,_,_;2;;0.34;3.123;;;;;

C,1,_____,_,_;1;40.00;;;;

T,1,_____,_,_;

I,1,_____,_,_;0;2.00;;;;

I,1,_____,_,_;1;2.00;;;;

F,1,_____,_,_;

MP5000



Executable commands : **S, C, T, P, Y, D.**

Example :

```
S,1,_____,_____;Cabbage;0.05;1.000;1;1;2;0;0;
S,1,_____,_____;Gherkins;0.05;1.000;1;1;2;0;0;
S,1,_____,_____;Potatoes;0.02;1.000;1;1;2;0;0;
S,1,_____,_____;Printer;0.05;3.000;1;1;2;0;0;
T,1,_____,_____;4;;;;;
C,1,_____,_____;1;10.00;;;
P,1,_____,_____; ;;;;
P,1,_____,_____;Is this a fiscal printer;;;;;
P,1,_____,_____;or a cash register?;;;;;
P,1,_____,_____; ;;;;
T,1,_____,_____;
D,1,_____,_____;
Y,1,_____,_____;Official receipt;;;;;
P,1,_____,_____;In the official receipt;;;;;
P,1,_____,_____; only P (text print);;;;;
P,1,_____,_____;and T (closing of official ;;;;
P,1,_____,_____;receipt) commands can be executed. ;;;;
T,1,_____,_____;
```


MP500, MP500T, MP500TR



Executable commands : **S, T, C, P, I**

Example :

```
S,1,_____,_____;Cabbage;0.05;1.000;1;1;2;0;0;
S,1,_____,_____;Gherkins;0.05;1.000;1;1;2;0;0;
C,1,_____,_____;0;10.00;,,,
S,1,_____,_____;Potatoes;0.02;1.000;1;1;2;0;0;
S,1,_____,_____;Printer;0.05;3.000;1;1;2;0;0;
T,1,_____,_____;4;,,,,
C,1,_____,_____;1;10.00;,,,
P,1,_____,_____;,,,,,
P,1,_____,_____;Is this a fiscal printer;,,,,
P,1,_____,_____;or a cash register?;,,,,
P,1,_____,_____;,,,,,
T,1,_____,_____;
I,1,_____,_____;0;1.5;,,,
I,1,_____,_____;1;1.5;,,,
```

(For Serbian Devices)

Executable commands : **S, T, C, P, I, H, F**

Example :

H,1,_____,_,_;
S,1,_____,_,_;2;;0.34;3.123;;;;;
C,1,_____,_,_;1;40.00;;;;
S,1,_____,_,_;7;;3.10;3.123;;;;;
P,1,_____,_,_;1111111;22222222;33333333;4444444;5555555;
T,1,_____,_,_;4;;;;;
C,1,_____,_,_;0;98.99;;;;
T,1,_____,_,_;4;;;;;
C,1,_____,_,_;1;98.99;;;;
S,1,_____,_,_;2;;0.10;3.005;;;;;
T,1,_____,_,_;1;0.05;;;;
T,1,_____,_,_;2;0.05;;;;
T,1,_____,_,_;3;0.05;;;;
T,1,_____,_,_;
P,1,_____,_,_;test1 ;test2 ;test3 ;test4 ;test5 ;
S,1,_____,_,_;2;;0.34;3.123;;;;;
C,1,_____,_,_;1;40.00;;;;
T,1,_____,_,_;
I,1,_____,_,_;0;2.00;;;;
I,1,_____,_,_;1;2.00;;;;
F,1,_____,_,_;

MP55M, MP55L, DP-50, DP-50D, DP 500, MP-55LD



Executable commands: S, F, H, C, P, T; { D, M, Z, I, Y, V – only for DP-50D, DP-500, MP-55LD, MP55L, MP55B, DP50 Albania }

{Z, V commands available for DP500, DP50, DP50D - Latvia}

Example:

```
H,1,_____,__,_;  
S,1,_____,__,_;Cabbage;1.07;1.452;1;1;2;0;0;  
C,1,_____,__,_;0;10.00;;;  
P,1,_____,__,_; ;;;;  
S,1,_____,__,_;Gherkins;1.05;1.000;1;1;2;0;0;  
P,1,_____,__,_; ;;;;  
S,1,_____,__,_;Potatoes;1.02;1.321;1;1;2;0;0;  
C,1,_____,__,_;1;10.00;;;  
P,1,_____,__,_; ;;;;  
S,1,_____,__,_;Printer;1.05;3.227;1;1;2;0;0;  
P,1,_____,__,_; ;;;;  
T,1,_____,__,_;4; ;;;;  
C,1,_____,__,_;1;10.00;;;  
P,1,_____,__,_; ;;;;  
P,1,_____,__,_;Is this a fiscal printer; ;;;;  
P,1,_____,__,_;or a cash register?; ;;;;  
P,1,_____,__,_; ;;;;  
T,1,_____,__,_;  
F,1,_____,__,_;
```

Examples for **DP 50D, MP 55LD, DP 500 – Albania:**

Print invoice (with number “169”) :

M,1,_____,_____;169;
S,1,_____,_____;Item 1;10;1.000;1;1;1;0;0;
S,1,_____,_____;Item 2;10;1.000;1;1;1;0;0;
T,1,_____,_____;4;;;;
C,1,_____,_____;1;10.00;;;;
T,1,_____,_____;

Deep void (clears the sale **and** the discount/surcharge):

S,1,_____,_____;Item 1;10;1.000;1;1;1;0;0;
C,1,_____,_____;1;10.00;;;;
S,1,_____,_____;Item 1;10;-1.000;1;1;1;0;0;
T,1,_____,_____;

Refund item with discount on the refund sum:

S,1,_____,_____;Item 1;11;1.000;1;1;1;0;0;
S,1,_____,_____;Item 1;-10;-1.000;1;1;1;0;0;
C,1,_____,_____;1;10.00;;;;
T,1,_____,_____;

Print X report:

Z,1,_____,_____;0;

Print Z report:

Z,1,_____,_____;1;

Clear archive (if enabled):

Z,1,_____,_____;2;

FP3530, FP550F, FP550F-40, FP300, FP300-Ke, FP1000, FP60, TM-T260F



Executable commands : **S, C, T, I, P, Y, Z, D, E, L, O, A, X**

(commands “A” and “X” are supported only for bulgarian FP300, FP1000, FP60, TM-T260F)

Example :

```
S,1,_____,_____;Cabbage;0.05;1.000;1;1;2;0;0;
S,1,_____,_____;Gherkins;0.05;1.000;1;1;2;0;0;
S,1,_____,_____;Potatoes;0.02;1.000;1;1;2;0;0;
S,1,_____,_____;Printer;0.05;3.000;1;1;2;0;0;
T,1,_____,_____;4;,,,,;
C,1,_____,_____;1;10.00;,,,;
P,1,_____,_____;,,,,;
P,1,_____,_____;Is this a fiscal printer;,,,,;
P,1,_____,_____;or a cash register?;,,,,;
P,1,_____,_____;,,,,;
T,1,_____,_____;
D,1,_____,_____;
I,1,_____,_____;0;1.5;,,,;
I,1,_____,_____;1;1.5;,,,;
Y,1,_____,_____;Official receipt;,,,,;
P,1,_____,_____;In the official receipt;,,,,;
P,1,_____,_____; only P (text print);,,,,;
P,1,_____,_____;and T (closing of official ;,,,,;
P,1,_____,_____;receipt) commands can be executed. ;,,,,;
T,1,_____,_____;
O,1,_____,_____;
Z,1,_____,_____; (execute only if there is no open receipt)
```

(For Serbian Devices)

Example :

P,1,_____,_____;Print;in; Fiscal;check;;;

S,1,_____,_____;2;;;1;1;2;0;0;

C,1,_____,_____;1;20.00;;;

S,1,_____,_____;2;;;3.000;1;1;2;0;0;

C,1,_____,_____;0;20.00;;;

T,1,_____,_____;4;;;

C,1,_____,_____;1;15.00;;;

S,1,_____,_____;2;;2.45;1.000;1;1;1;0;0;

S,1,_____,_____;2;;1.32;1.000;1;1;1;0;0;

T,1,_____,_____;4;;;

C,1,_____,_____;0;15.00;;;

T,1,_____,_____;0;0.01;;;

T,1,_____,_____;1;0.02;;;

T,1,_____,_____;2;0.03;;;

T,1,_____,_____;3;0.04;;;

T,1,_____,_____;;;;

Y,1,_____,_____;;;;

P,1,_____,_____;Print;in;non;fiscal;check;;

P,1,_____,_____; !"#\$%&'()*+,-./;0123456789;.<=>?

@ABCDEFGHIJK;LMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz;

P,1,_____,_____;qrstuvwxyz{|}~ €;Š Œ;Ž;š œ žŸ; ;;

P,1,_____,_____;ÀÁÂÃÄÅÆÇÈÉÊËÌÍÎÏÐ;ÑÒÓÔÕÖ×Ø; ;àáâãäåæçèéêë;ìíîïðñòóôõ÷ø;;

T,1,_____,_____;;;;

I,1,_____,_____;0;1.11;;;

I,1,_____,_____;1;2.22;;;

D,1,_____,_____;;;;

Z,1,_____,_____; (as a single line in file)

Showing text on the display:

L,1,_____,_,_;0;0;;

L,1,_____,_,_;3;0;Text - top row;

L,1,_____,_,_;4;0;Text - bottom row;

L,1,_____,_,_;1;0;;

L,1,_____,_,_;3;1;Floating text on the top row;

L,1,_____,_,_;2;0;;

L,1,_____,_,_;4;1;Floating text on the bottom row;

L,1,_____,_,_;1;0;;

L,1,_____,_,_;3;0;Large text, shown on the top row of the printer's display;

L,1,_____,_,_;2;0;;

L,1,_____,_,_;4;0;Large text, shown on the bottom row of the printer's display;

L,1,_____,_,_;0;0;;

L,1,_____,_,_;5;1;This is some large floating text that is currently displayed on the both rows;

L,1,_____,_,_;5;0;This is some large text that is currently displayed on the both rows;

L,1,_____,_,_;0;0;;

L,1,_____,_,_;3;0;Date and time;

L,1,_____,_,_;6;0;;

Annual / monthly reports for TM-T260 Bulgaria:

Z,1,_____,_,_;2;10;3;

Z,1,_____,_,_;3;10;4;

Z,1,_____,_,_;2;10;

FP60, FP550, FP300, FP1000 - Kazakhstan



Executable commands : S, C, T, I, P, Y, Z, D, L, O.

Example :

```
S,1,_____,_____;Cabbage;0.05;1.000;1;1;1;0;0;
S,1,_____,_____;Gherkins;0.05;1.000;1;1;2;0;0;
S,1,_____,_____;Potatoes;0.02;1.000;1;1;2;0;0;
S,1,_____,_____;Printer;0.05;3.000;1;1;5;0;0;
T,1,_____,_____;4;;;;;
C,1,_____,_____;1;10.00;;;;
P,1,_____,_____; ;;;;
P,1,_____,_____;Is this a fiscal printer;;;;;
P,1,_____,_____;or a cash register?;;;;;
P,1,_____,_____; ;;;;
T,1,_____,_____;
D,1,_____,_____;
I,1,_____,_____;0;1.5;;;;
I,1,_____,_____;1;1.5;;;;
Y,1,_____,_____;Official receipt;;;;;
P,1,_____,_____;In the official receipt;;;;;
P,1,_____,_____; only P (text print);;;;;
P,1,_____,_____;and T (closing of official ;;;;
P,1,_____,_____;receipt) commands can be executed. ;;;;
T,1,_____,_____;
O,1,_____,_____;

Z,1,_____,_____; (execute only if there is no open receipt)
```


Showing text on the display:

L,1,_____,_,_;0;0;;

L,1,_____,_,_;3;0;Text - top row;

L,1,_____,_,_;4;0;Text - bottom row;

L,1,_____,_,_;1;0;;

L,1,_____,_,_;3;1;Floating text on the top row;

L,1,_____,_,_;2;0;;

L,1,_____,_,_;4;1;Floating text on the bottom row;

L,1,_____,_,_;1;0;;

L,1,_____,_,_;3;0;Large text, shown on the top row of the printer's display;

L,1,_____,_,_;2;0;;

L,1,_____,_,_;4;0;Large text, shown on the bottom row of the printer's display;

L,1,_____,_,_;0;0;;

L,1,_____,_,_;5;1;This is some large floating text that is currently displayed on the both rows;

L,1,_____,_,_;5;0;This is some large text that is currently displayed on the both rows;

L,1,_____,_,_;0;0;;

L,1,_____,_,_;3;0;Date and time;

L,1,_____,_,_;6;0;;

FP 550 *Republica Srpska*



Executable commands : **R, T, I, P, Y, Z, G, K.**

Examples:

- loading items

G,1,_____,_,_;1;Test1Item1;1;0.91;

G,1,_____,_,_;2;Test1Item2;0;0.11;

- delete all items

K,1,_____,_,_;;A;

- delete item number 1

K,1,_____,_,_;1;;

- sale with no change(exact amount payed)

R,1,_____,_,_;1;1;0;

T,1,_____,_,_;

- sale with amount in cash

R,1,_____,_,_;1;1;0;

T,1,_____,_,_;0;200;;;;

- sale with mixed payment

R,1,_____,_,_;1;1;0;

T,1,_____,_,_;0;10;;;;

T,1,_____,_,_;1;10;;;;

T,1,_____,_,_;2;10;;;;

T,1,_____,_,_;3;10;;;;

- storno for item 1

R,1,_____,_,_;1;1;1;

T,1,_____,_,_;5;;;;;

- storno for item 1 with some sum payed

R,1,_____,_,_;1;1;1;

T,1,_____,_,_;5;1.00;;;;;

- service receipt with nonfiscal text

Y,1,_____,_,_;

P,1,_____,_,_; ;;;;;

P,1,_____,_,_;Print test2;test3;test4;test5;test6;

P,1,_____,_,_; some more text ;;;;;

T,1,_____,_,_;

- Z report

Z,1,_____,_,_;

FP 550 Bangladesh



Executable commands : **38,48,49,51,69,70,84, C, T, P, D, L,O.**

Example :

```
48,1,_____,_____;1;000000;0;
49,1,_____,_____;Gherkins;0.05;1.000;5;0;0;0;
49,1,_____,_____;Potatoes;0.02;1.000;1;0;0;10;
49,1,_____,_____;Printer;0.05;1.000;2;0;1;10;
49,1,_____,_____;Printer;-0.05;1.000;2;0;1;10;
84,1,_____,_____;3;00000178SR05;
51,1,_____,_____;1;1;1;10;
P,1,_____,_____;Is this a fiscal printer;;;;;
T,1,_____,_____;
D,1,_____,_____;
70,1,_____,_____;0;1.5;1;000000;
70,1,_____,_____;1;1.5;1;000000;
38,1,_____,_____;1;000000;
P,1,_____,_____;In the official receipt;;;;;
P,1,_____,_____; only P (text print);;;;;
P,1,_____,_____;and T (closing of official ;;;;
P,1,_____,_____;receipt) commands can be executed. ;;;;
T,1,_____,_____;
O,1,_____,_____;
69,1,_____,_____;1;000000;1;
```

Showing text on the display:

L,1,_____,__,;0;0;;

L,1,_____,__,;3;0;Text - top row;

L,1,_____,__,;4;0;Text - bottom row;

L,1,_____,__,;1;0;;

L,1,_____,__,;3;1;Floating text on the top row;

L,1,_____,__,;2;0;;

L,1,_____,__,;4;1;Floating text on the bottom row;

L,1,_____,__,;1;0;;

L,1,_____,__,;3;0;Large text, shown on the top row of the printer's display;

L,1,_____,__,;2;0;;

L,1,_____,__,;4;0;Large text, shown on the bottom row of the printer's display;

L,1,_____,__,;0;0;;

L,1,_____,__,;5;1;This is some large floating text that is currently displayed on the both rows;

L,1,_____,__,;5;0;This is some large text that is currently displayed on the both rows;

L,1,_____,__,;0;0;;

L,1,_____,__,;3;0;Date and time;

L,1,_____,__,;6;0;;

Exchange receipt with discounts on each item:

48,1,_____,__,;1;000000;1;

49,1,_____,__,;Gherkins;0.05;1.000;5;1;1;10.00;

49,1,_____,__,;Potatoes;0.02;1.000;2;0;1;10.00;

49,1,_____,__,;Printer;0.05;1.000;2;0;1;10.00;

T,1,_____,__,;

NEW – example for discounts/surcharges with value (not %) :

48,1,_____,__,;1;000000;0;

49,1,_____,__,;Gherkins;0.05;1.000;5;0;0;0;

49,1,_____,__,;Gherkins;0.05;1.000;5;0;2;1.00;

49,1,_____,__,;Potatoes;0.02;1.000;1;0;3;0.01;

49,1,_____,__,;Printer;0.05;1.000;1;0;2;1.00;

T,1,_____,__,;

FP 550, FP2000 Albania



Executable commands: 38,42,39,48,49,51,53,54,56,60,33,47,35,63,100,69,70,84,106

Examples:

Sell:

```
48,1,_____,__,_;;1;000000;  
49,1,_____,__,_;;Item_test;1.34;1.000;2;0;0;0;  
54,1,_____,__,_;;Some fiscal text;  
51,1,_____,__,_;;1;1;1;10;  
53,1,_____,__,_;;  
56,1,_____,__,_;;
```

Non-fiscal receipt:

```
38,1,_____,__,_;;  
42,1,_____,__,_;;Some nonfiscal text;  
39,1,_____,__,_;;
```

Cashing in and out:

```
70,1,_____,__,_;;0;10;  
70,1,_____,__,_;;1;10;
```

Sell with barcode:

```
48,1,_____,__,_;;2;000000;  
49,1,_____,__,_;;Item_test2;1.34;1.000;9;0;1;20;  
84,1,_____,__,_;;3;SAA000178SR05;  
49,1,_____,__,_;;Item_test3;1.34;1.000;8;0;1;20;  
49,1,_____,__,_;;Item_test3;-1.34;1.000;8;0;1;20;  
49,1,_____,__,_;;Item_test4;1.34;1.000;9;1;1;20;  
53,1,_____,__,_;;  
56,1,_____,__,_;;
```

Display text:

```
33,1,_____,__,_;;  
47,1,_____,__,_;;Text on TOP;  
35,1,_____,__,_;;Text on BOTTOM;  
63,1,_____,__,_;;  
100,1,_____,__,_;; Text on TOP and Text on BOTTOM;
```

Cancel fiscal receipt:

48,1,_____,_,_;1;000000;

49,1,_____,_,_;Item_test;1.34;1.000;2;0;0;0;

60,1,_____,_,_;

Open drawer:

106,1,_____,_,_;

Print X report:

69,1,_____,_,_;1;

DP 500 plus, DP55 plus, MP55 plus – Romania

DP 500 plus, DP55 plus, MP55 plus – Latvia

Executable commands : S, C, T, I, P, Y, Z, D, E, L,O,X

Example :

```
S,1,_____,_____;Cabbage;0.05;1.000;1;1;2;0;0;
S,1,_____,_____;Gherkins;0.05;1.000;1;1;2;0;0;
S,1,_____,_____;Potatoes;0.02;1.000;1;1;2;0;0;
S,1,_____,_____;Printer;0.05;3.000;1;1;2;0;0;
T,1,_____,_____;4;,,,,;
C,1,_____,_____;1;10.00;,,,;
P,1,_____,_____;,,,,;
P,1,_____,_____;Is this a fiscal printer;,,,,;
P,1,_____,_____;or a cash register?;,,,,;
P,1,_____,_____;,,,,;
T,1,_____,_____;
D,1,_____,_____;
I,1,_____,_____;0;1.5;,,,;
I,1,_____,_____;1;1.5;,,,;
Y,1,_____,_____;
P,1,_____,_____;In the official receipt;,,,,;
P,1,_____,_____; only P (text print);,,,,;
P,1,_____,_____;and T (closing of official ;,,,;
P,1,_____,_____;receipt) commands can be executed. ;,,,,;
T,1,_____,_____;
```

Reports:

```
Z,1,_____,_____; or Z,1,_____,_____;1; - Z report
Z,1,_____,_____;0; - X report
Z,1,_____,_____;2;010511;020511; - short report(see description for command Z);
```


DP 500 plus, DP55 plus, MP55 plus - Moldova

Executable commands : S, C, T, I, P, Y, Z, D, E, L, O, X

Example :

```
S,1,_____,_____;Cabbage;0.05;1.000;1;1;2;0;0;
S,1,_____,_____;Gherkins;0.05;1.000;1;1;2;0;0;
S,1,_____,_____;Potatoes;0.02;1.000;1;1;2;0;0;
S,1,_____,_____;Printer;0.05;3.000;1;1;2;0;0;
T,1,_____,_____;4;;;;;
C,1,_____,_____;1;10.00;;;;;
P,1,_____,_____; ;;;;;
P,1,_____,_____;Is this a fiscal printer;;;;;
P,1,_____,_____;or a cash register?;;;;;
P,1,_____,_____; ;;;;;
T,1,_____,_____;
D,1,_____,_____;
I,1,_____,_____;0;1.5;;;;;
I,1,_____,_____;1;1.5;;;;;
Y,1,_____,_____;
P,1,_____,_____;In the official receipt;;;;;
P,1,_____,_____; only P (text print);;;;;
P,1,_____,_____;and T (closing of official ;;;;;
P,1,_____,_____;receipt) commands can be executed. ;;;;;
T,1,_____,_____;
```

Reports:

```
Z,1,_____,_____; or Z,1,_____,_____;1; - Z report
Z,1,_____,_____;0; - X report
Z,1,_____,_____;2;010511;020511; - short report(see description for command Z);
```

Samsung ER-250F.



Executable commands : **S, T**

Example:

S,1,_____,_,_;Cabbage;0.05;1.000;1;1;2;0;0;

S,1,_____,_,_;Gherkins;0.05;1.000;1;1;2;0;0;

S,1,_____,_,_;Potatoes;0.02;1.000;1;1;2;0;0;

S,1,_____,_,_;Printer;0.05;3.000;1;1;2;0;0;

T,1,_____,_,_;

Fprint DLL – software developers guide

This library (FprintWIN.dll) is distributed along with Fprint. It lets you integrate the communication for the devices (see list of [supported devices](#)) into your software. Uses the same serial key as the one for Fprint.

Functions

OPEN_PORT	
Syntax	function OPEN_PORT(ComPort : byte; BaudRate : integer; StopBits : byte; Parity : byte; ByteSize : byte; DEVICE_INDEX : integer; Logical_number : integer; SERIAL_KEY : Widestring) : integer; stdcall;
Description	Opens the serial port. Returns current status of the device, specified by the DEVICE_INDEX.
Parameters	ComPort : byte; - defines serial port number BaudRate : integer; - defines port speed StopBits : byte; - serial port setting Parity : byte; - serial port setting ByteSize : byte; - serial port setting DEVICE_INDEX : integer; - list of devices : Logical_number : integer; - network/logical number of the device SERIAL_KEY – this is the key (given by our resellers when you purchase this DLL or FPrint) that corresponds to the serial number of your device.
Return values	Return codes

CLOSE_PORT	
Syntax	function CLOSE_PORT : integer;stdcall;
Description	Closes the serial port and destroys the current device object
Parameters	none
Return values	Return codes

OPEN_TCPIP

Syntax	function OPEN_TCPIP(IP_Address : Widestring; TCP_Port : integer; DEVICE_INDEX : integer; SERIAL_KEY : WideString) : integer ; stdcall ;
Description	Opens a socket connection, defined by the IP and Port of the device. Returns current status of the device, specified by the DEVICE_INDEX.
Parameters	IP_Address : Widestring; - IP address of the device (eg. 192.168.0.1) TCP_Port : integer; - the port number of the device DEVICE_INDEX : integer; - list of devices : SERIAL_KEY – this is the key (given by our resellers when you purchase this DLL or FPrint) that corresponds to the serial number of your device.
Return values	Return codes
Notes	Currently this function works with FP2000 only. Use DEVICE_INDEX = 1008 (TCPIP intefrace)

CLOSE_TCPIP

Syntax	function CLOSE_TCPIP : integer ; stdcall ;
Description	Closes the socket connection and destroys current device object.
Parameters	none
Return values	Return codes
Notes	Currently this function works with FP2000 only.

EXECUTE_STRING

Syntax	function EXECUTE_STRING(var Execute_Value : WideString) : integer ;stdcall;
Description	Sends one command string to the device. The format of the strings and commands is described in the FPrint manual
Parameters	Execute_Value : WideString – the string to be executed - one command only. The parameter contains answer string from some commands (eg. 48,56)
Return values	Return codes
	NOTE: In firmware version "75.x1.13 / 28.05.2009" for Albanian devices DP500, DP50D, MP55LD, commands Y and P will return that the command has not succeeded (11,12,13) even if the ECR prints the texts. This is known firmware bug and pending a fix in next firmware versions.

EXECUTE_FILE

Syntax	function EXECUTE_FILE(Execute_file_name, Answer_file_name : WideString; Dos_text : boolean; ClassicAnswer : boolean) : integer ;stdcall;
Description	Executes the commands within a file (Fprint format) and saves the answer for each command in answer file
Parameters	Execute_file_name : WideString – file name of the file to be printed Answer_file_name : WideString – answer file (if you dont pass file name, the answer is saved in the execute_file_name) Dos_text : boolean; if true - converts chars (0x80 - 0xBF) into letters (0xC0 – 0xFF); useful if you pass DOS generated strings to the device ClassicAnswer : boolean; specifies the type of answer (status) in the answer file – see Fprint documentation; if true – Classic answer, if false – Error number
Return values	Return codes Note: the answer file contains Fprint error codes (0-12)

GET_SERIAL_NUMBER

Syntax	<pre>function GET_SERIAL_NUMBER(ComPort : byte; BaudRate : integer; StopBits : byte; Parity : byte; ByteSize : byte; DEVICE_INDEX : integer; Logical_number : integer; var SERIAL_NUMBER : WideString) : integer; stdcall;</pre>
Description	Retrieves serial number for a device.
Parameters	ComPort : byte; - defines serial port number BaudRate : integer; - defines port speed StopBits : byte; - serial port setting Parity : byte; - serial port setting ByteSize : byte; - serial port setting DEVICE_INDEX : integer; - list of devices ; Logical_number : integer; - network/logical number of the device; SERIAL_NUMBER : WideString – output parameter, the serial number is stored here
Return values	Return codes

GET_SERIAL_NUMBER_TCPIP

Syntax	<pre>function GET_SERIAL_NUMBER_TCPIP(IP_Address : Widestring; TCP_Port : integer; DEVICE_INDEX : integer; var SERIAL_NUMBER : WideString) : integer; stdcall;</pre>
Description	Retrieves serial number for a device, connected over TCP_IP.
Parameters	IP_Address : Widestring; - IP address of the device (eg. 192.168.0.1) TCP_Port : integer; - the port number of the device DEVICE_INDEX : integer; - list of devices ; SERIAL_KEY – this is the key (given by our resellers when you purchase this DLL or FPrint) that corresponds to the serial number of your device.
Return values	Return codes
Notes	Currently this function works with FP2000 only. Use DEVICE_INDEX = 1008 (TCPIP intefrace)

GET_LAST_ERROR

Syntax	function GET_LAST_ERROR : integer; stdcall
Description	Returns the result code of the last executed function
Parameters	none
Return values	Return codes

GET_LAST_ERROR_MESSAGE

Syntax	function GET_LAST_ERROR_MESSAGE : WideString; stdcall;
Description	Returns message, corresponding to the last result code
Parameters	none
Return values	Return codes

Device indexes

INDEX	DEVICE
Albania	
1000	DT 50D with active keyboard (table2, field 8 is with value 3)
1001	DP 500 with active keyboard (table2, field 8 is with value 3)
1002	MP 55LD with active keyboard (table2, field 8 is with value 3)
1003	FP 550
1004	MP 55L with active keyboard (table2, field 8 is with value 3)
1005	DP 50 with active keyboard (table2, field 8 is with value 3)
1006	MP 55B with active keyboard (table2, field 8 is with value 3)
1007	FP 2000 with <u>RS232</u> communication interface
1008	FP 2000 with <u>TCP IP</u> communication interface
Montenegro	
2001	FP 550
2002	FP 1000
Ethiopia	
3001	FP 60
Federation of Bosnia and Herzegovina	
4001	FP 550
4002	TM-T260F
4100	MP 55 Plus

Returned codes

VALUE	MEANING
ECR return codes	
14	Error, the last command not executed
13	Status number: - the last command was not executed; - the keyboard is unlocked and only "H", "F" commands accepted;
12	Status number: - the last command was not executed; - the keyboard is locked;
11	Status number: - the last command was not executed; - the keyboard is locked; - open receipt;
10	ECR is not in active keyboard mode (table 2, row 8, value 3). The DLL operates only in this mode.
>	NOTE: messages 11, 12, 13, 14 are always returned when the last command (except for "H" and "F") was not executed, but the input parameters are correct.
4	Status number: - the last command successfully executed; - the keyboard is locked; - open receipt;
3	Status number: - the last command successfully executed; - the keyboard is locked;
2	Status number: - the last command was successfully executed; - the keyboard is unlocked and only "H", "F" commands accepted;
1	Status number: - Successful "H" or "F" command; - Input parameters for all commands (not "H" , "F") are correct;
-1 till -9	Device communication exceptions (generally you get those from device turned off or not in REG mode)
-100	Wrong input parameters or the keyboard is unlocked
-101 till -113	Class exceptions due to wrong parameters/bugs
FP return codes	
-40 till -46	Device communication exceptions, check if the device is on.
-50	The printer is out of paper.
-51	General/syntax error – could be one of the following: - command is invalid; - command syntax error; - RAM failiure after power ON; - operational memory was cleared; - command cannot be executed in current fiscal mode;

-52	Incorrect command number in the string
-53	Opened fiscal receipt, command not allowed
-54	Opened nonfiscal receipt, command not allowed
-55	No opened receipt, command not allowed
-56	SD card full (less than 1MB free space)
-57	Fiscal memory error (read/write failed/corrupt, memory in read-only state or last entry is corrupt)
-201 till -250	Wrong command parameters
<i>Common (ECR and FP) return codes</i>	
0	No errors or exceptions
-10000	Wrong logical number, check your string or file
-10001	Function "EXECUTE_FILE" - execute file does not exist
-10002	Function "EXECUTE_FILE" - wrong file format. Something is wrong in the string within the file – check Fprint documentation for help about the commands structure.
-100000	Function "OPEN_PORT" – the serial key is wrong
-5000	Exception in "OPEN_PORT" function - check your parameters
-5001	Exception in "EXECUTE_STRING" function - check your parameters
-5002	Exception in "EXECUTE_FILE" function - check your parameters
-5003	Exception in "CLOSE_PORT" function
-5004	Exception in "GET_SERIAL_NUMBER" function - check your parameters
-5005	Exception in "GET_SERIAL_NUMBER_TCPIP" function - check your parameters
-5006	Exception in "OPEN_TCPIP" function - check your parameters
-5007	Exception in "CLOSE_TCPIP" function

Contact information and technical support

E-mail :

cvetanov@datecs.bg

Web : <http://www.datecs.bg>